

Submittal Data



ALPHA1 15-55F


ALPHA1 15-55 is a high-efficiency ECM variable speed circulator designed for a variety of heating applications. The pump features three constant-pressure control modes.

Note! Product picture may differ from actual product

Conditions of Service		
Liquid:	Water	
Temperature:	140 °F	
Specific Gravity:	0.985	


Pump Data	
Maximum operating pressure:	145.04 psi
Liquid temperature range:	35.6 230 °F
Maximum ambient temperature:	104 °F
Approvals:	ETL, FCC
Pipe connection:	1 1/2
Product number:	99287256


Motor Data		
P1 max:	5 45 W	
Rated voltage:	115 V	
Mains frequency:	60 Hz	
Enclosure class:	IP42	
Insulation class:	F	
Motor protection:	NONE	
Thermal protection:	ELEC	

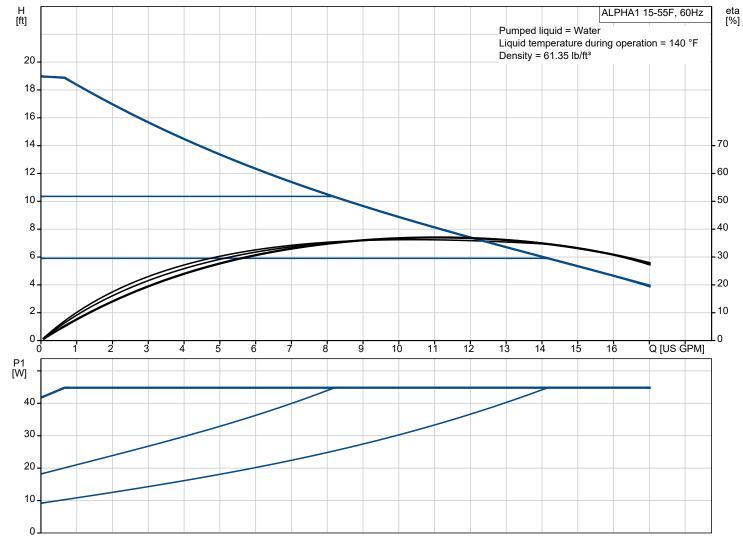

Submittal Data



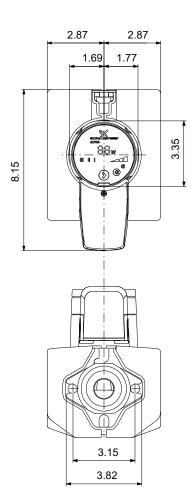

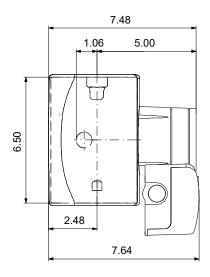

Materials:

Pump housing: Cast iron

Pump housing: EN 1561 EN-GJL-150

Impeller: Composite

Description	Value
General information:	
Product name:	ALPHA1 15-55F
Product No:	99287256
EAN number:	5713826610364
Technical:	
Head max:	18.05 ft
TF class:	110
Approvals on nameplate:	ETL, FCC
Materials:	
Pump housing:	Cast iron
Pump housing:	EN 1561 EN-GJL-150
Impeller:	Composite
Installation:	
Range of ambient temperature:	32 104 °F
Maximum operating pressure:	145.04 psi
Type of connection:	GF
Pipe connection:	1 1/2
Pressure rating:	PN 10
Port-to-port length:	6 1/2 in
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	35.6 230 °F
Selected liquid temperature:	140 °F
Density:	61.35 lb/ft³
Electrical data:	
Power input - P1:	5 45 W
Mains frequency:	60 Hz
Rated voltage:	1 x 115 V
Maximum current consumption:	0.1 0.65 A
Enclosure class (IEC 34-5):	IP42
Insulation class (IEC 85):	F
Built-in motor protection:	NONE
Thermal protec:	ELEC
Controls:	
Pos term box:	6H
Others:	
Net weight:	6.34 lb
Gross weight:	7.1 lb
Shipping volume:	0.28 ft ³
Sales region:	USA

