

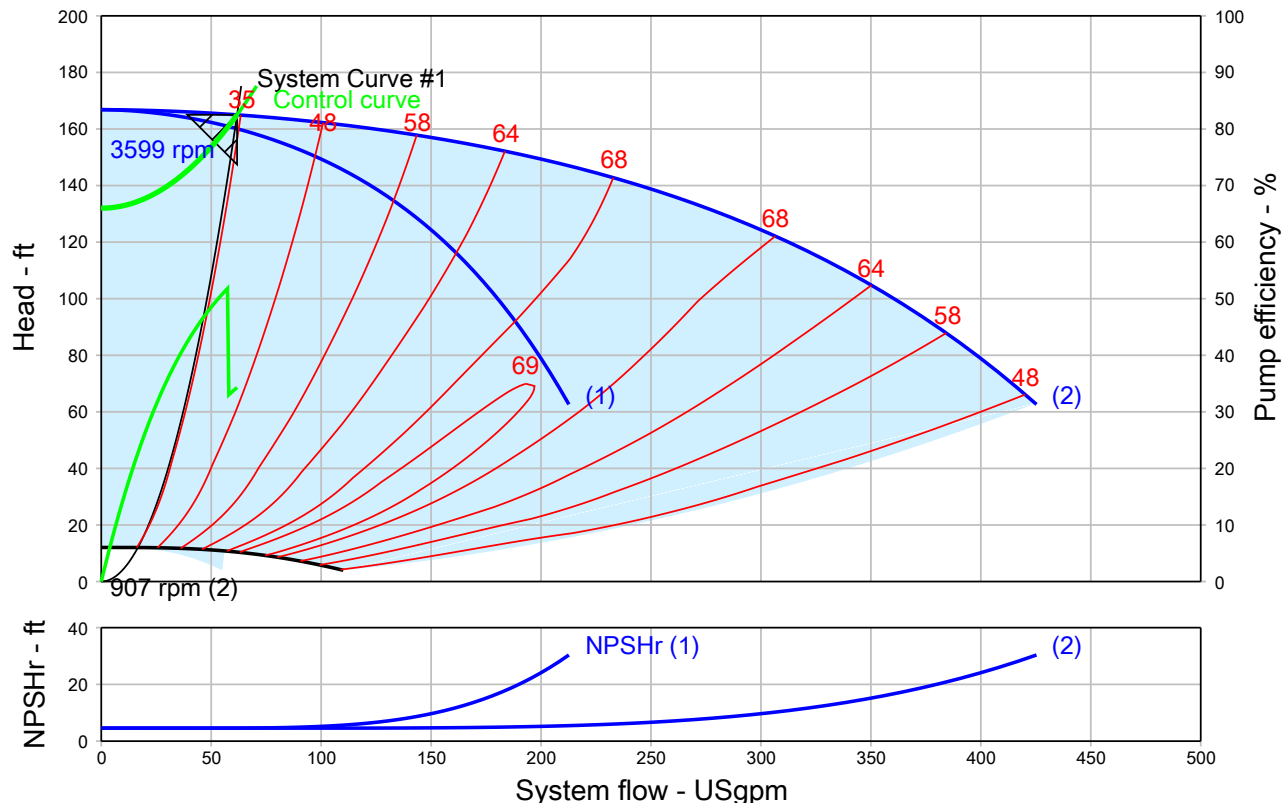
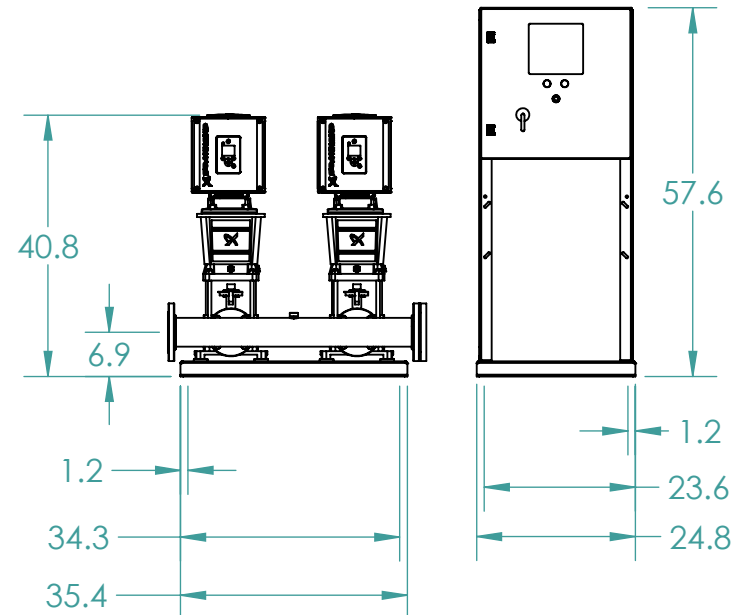
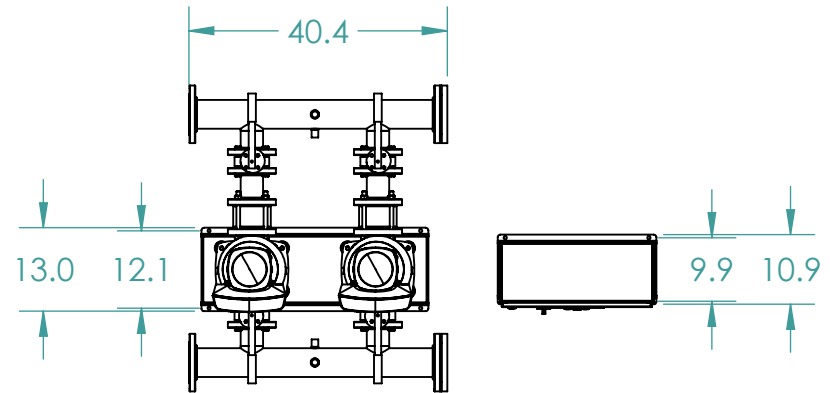




## Pump Performance Datasheet

|                                                 |   |                                                                                       |   |                                               |
|-------------------------------------------------|---|---------------------------------------------------------------------------------------|---|-----------------------------------------------|
| Customer                                        | : | Quote Number / ID                                                                     | : | 1471203                                       |
| Customer ref. / PO                              | : | Model                                                                                 | : | Hydro MPC-E 2CRE 32-2-1 3x460V                |
| Tag Number                                      | : |                                                                                       | : | 60Hz                                          |
| Service                                         | : | Part Number                                                                           | : | 99863856                                      |
| Quantity                                        | : | Stages                                                                                | : | 2                                             |
| Quantity of pumps                               | : | Based on curve number                                                                 | : | RC10454                                       |
|                                                 |   | Date last saved                                                                       | : | 05/17/2022 1:14 PM                            |
| Operating Conditions                            |   | Liquid                                                                                |   |                                               |
| System flowrate                                 | : | Liquid type                                                                           | : | Cold Water                                    |
| Flowrate per pump                               | : | Additional liquid description                                                         | : |                                               |
| Differential head / pressure, rated (requested) | : | Temperature, max                                                                      | : | 68.00 deg F                                   |
| Differential head / pressure, rated (actual)    | : | Fluid density, rated / max                                                            | : | 1.000 / 1.000 SG                              |
| Suction pressure, min / max                     | : | Viscosity, rated                                                                      | : | 1.00 cP                                       |
| NPSH available, rated                           | : | Vapor pressure, rated                                                                 | : | 0.34 psi.a                                    |
| Site Supply Frequency                           | : | Material                                                                              |   |                                               |
| Power Supply                                    | : | Material selected                                                                     | : | Standard - Cast Iron / 304<br>Stainless Steel |
| Performance                                     |   | Pressure Data                                                                         |   |                                               |
| Speed, rated                                    | : | Pump shut off pressure                                                                | : | 72.20 psi.g                                   |
| Speed, maximum                                  | : | Maximum allowable suction pressure                                                    | : | 58.00 psi.g                                   |
| Speed, minimum                                  | : | Driver & Power Data (@Max density)                                                    |   |                                               |
| Pump efficiency                                 | : | Motor sizing specification                                                            | : | Max power (non-overloading)                   |
| NPSH required / margin required                 | : | Margin over specification                                                             | : | 0.00 %                                        |
| nq (imp. eye flow) / S (imp. eye flow)          | : | Service factor                                                                        | : | 1.00                                          |
| Head maximum, rated speed                       | : | Rated power (based on duty point)                                                     | : | 2 x 3.75 hp                                   |
| Head rise to shutoff                            | : | Max power (non-overloading)                                                           | : | 2 x 7.36 hp                                   |
| Flow, best eff. point                           | : | Motor rating                                                                          | : | 2 x 7.50 hp / 5.59 kW (Fixed)                 |
| Flow ratio, rated / BEP                         | : | Panel Max FLA                                                                         | : | 20.2 A                                        |
| Speed ratio (rated / max)                       | : | MCA                                                                                   | : | 24.8 A                                        |
| Head ratio (rated speed / max speed)            | : | MOCP                                                                                  | : | 30 A                                          |
| Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]                | : | *Addition of pilot pump, up-sizing HP, or 575V will affect System FLA, MCA, and MOCP. |   |                                               |
| Selection status                                | : |                                                                                       |   |                                               |
| Energy Indexes                                  |   |                                                                                       |   |                                               |
| PEI (VL)                                        | : |                                                                                       |   |                                               |
| ER (VL)                                         | : |                                                                                       |   |                                               |

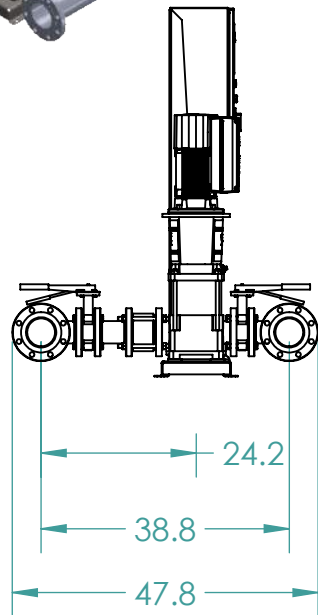

1. Manifolds 4" ANSI Class 150 AISI 316SS Schedule 10s ASTM A312 or  $\varnothing 114.3\text{mm} \times 2\text{mm}$
  2. Base/Frame AISI 304SS
  3. Standard system layout : panel right facing suction
  4. 3" lug style ANSI 150# class butterfly valve
  5. UL Type 3R/12 rated electrical panel
- Note: panel size will vary with options

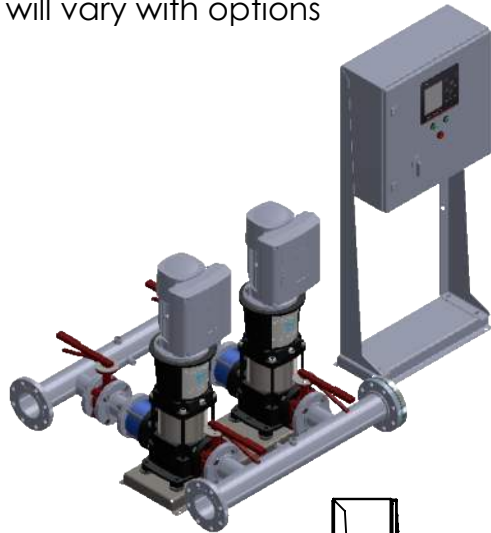

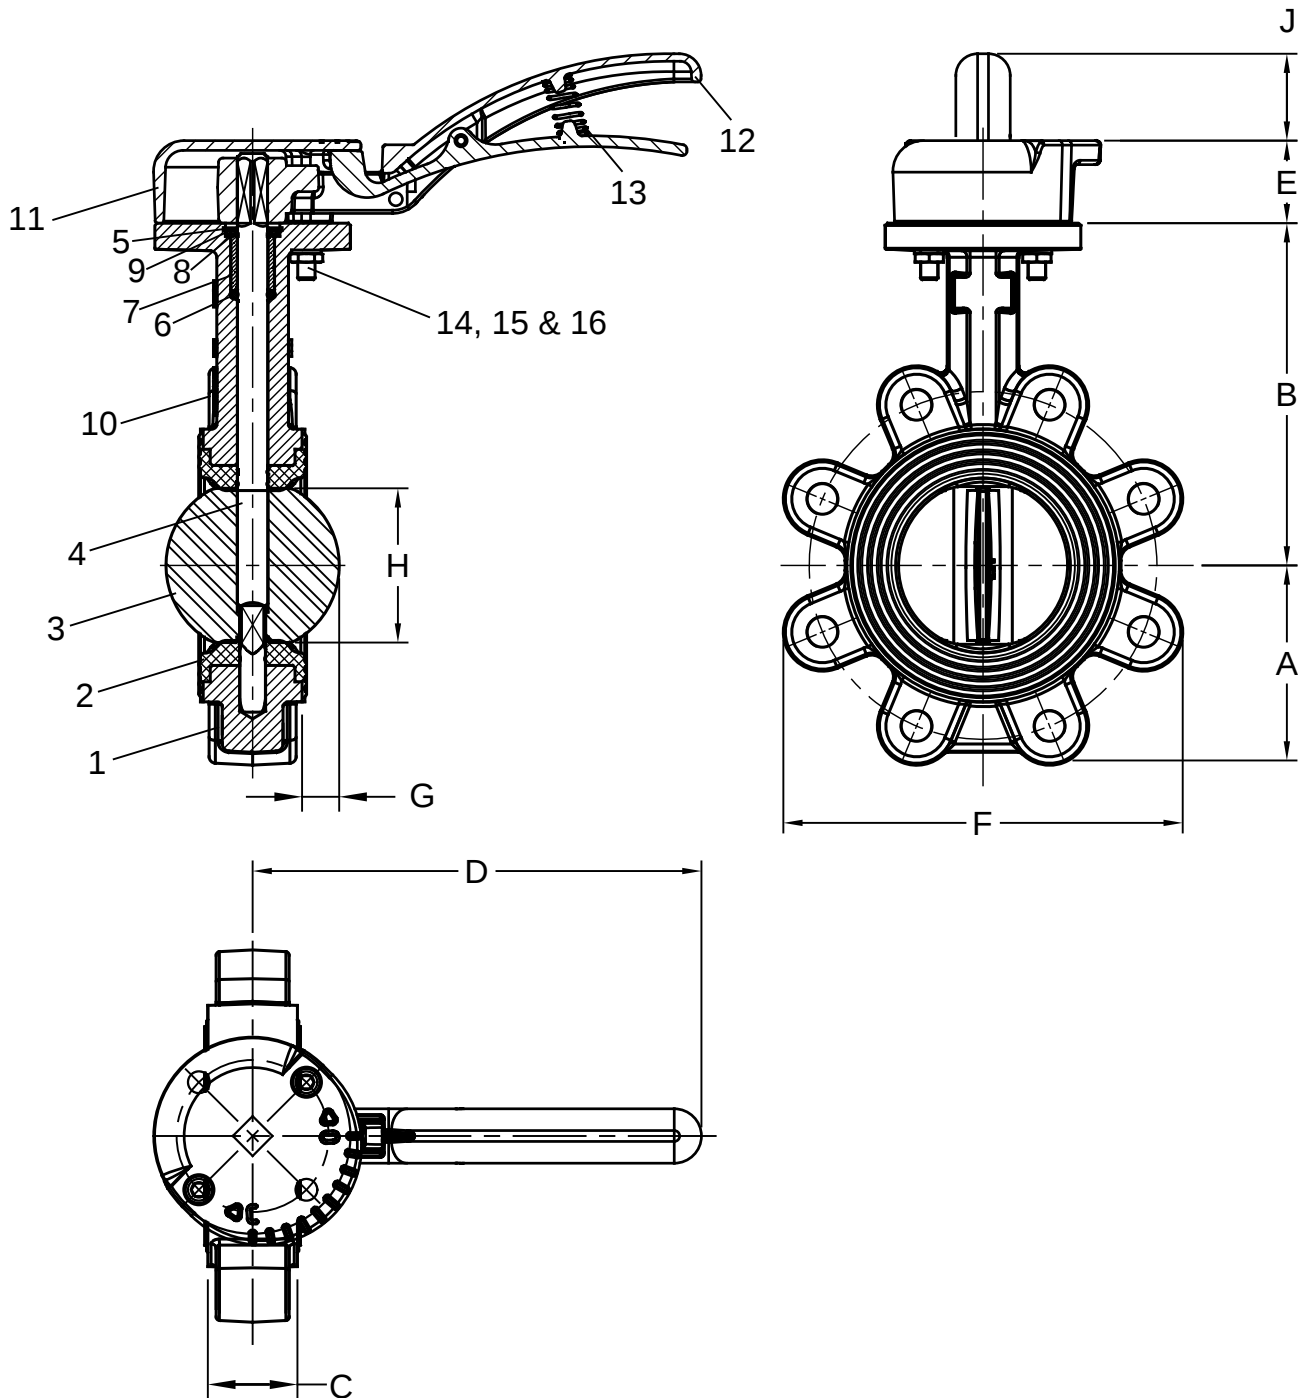**Materials**

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2018 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. [www.flomatic.com](http://www.flomatic.com)

# Butterfly Valves

# Lug with Lever


Sylax® 3



Flomatic Corporation

Sizes 2" Thru 5"/ 50 mm Thru 125 mm

## Materials



Max Temp 220°F (104°C)  
Max Pressure 250psi (17bar)

Bi-Directional & Dead End Service Pressure Rating 250psi (17 bar)

| Item # | Qty | Description | Material                    | Item # | Qty | Description    | Material                   |
|--------|-----|-------------|-----------------------------|--------|-----|----------------|----------------------------|
| 1      | 1   | Body        | Ductile Iron A536 65-45-12  | 9      | 1   | Washer         | Stainless Steel 304        |
| 2      | 1   | Seat        | EPDM                        | 10     | 1   | Metal Tag      | Aluminium                  |
| 3      | 1   | Disc        | Stainless Steel 316         | 11     | 1   | Cap            | Ductile Iron A536 65-45-12 |
| 4      | 1   | Shaft       | Stainless Steel 420         | 12     | 1   | Lever Assembly | Ductile Iron A536 65-45-12 |
| 5      | 1   | Circlip     | Steel XC 75/Stainless Steel | 13     | 1   | Spring         | Carbon Steel               |
| 6      | 1   | O'Ring      | NBR                         | 14     | 1   | SHC Screw      | Zinc Plated Carbon Steel   |
| 7      | 1   | Bushing     | Nylon 1010                  | 15     | 2   | Stop Washer    | Zinc Plated Carbon Steel   |
| 8      | 1   | Circlip     | Steel XC 75/Stainless Steel | 16     | 2   | Nut            | Zinc Plated Carbon Steel   |

## Dimesnions (ASME B16.5 150# Flange / ISO 5211 Top Flange)

| Size  |     | Part # | A    |     | B    |     | C    |    | D    |     | E    |    | F    |     | G    |    | H    |     | J    |    | Wgt Lug |      |
|-------|-----|--------|------|-----|------|-----|------|----|------|-----|------|----|------|-----|------|----|------|-----|------|----|---------|------|
| inch  | mm  |        | inch | mm  | inch | mm  | inch | mm | inch | mm  | inch | mm | inch | mm  | inch | mm | inch | mm  | inch | mm | lbs     | kg   |
| 2     | 50  | S3L04  | 2.5  | 65  | 5.67 | 144 | 1.69 | 43 | 8.15 | 207 | 1.50 | 38 | 4.93 | 125 | .21  | 5  | 2.12 | 54  | 1.50 | 38 | 10.2    | 4.6  |
| 2-1/2 | 65  | S3L05  | 2.8  | 72  | 6.02 | 153 | 1.81 | 46 | 8.15 | 207 | 1.50 | 38 | 5.47 | 139 | .38  | 10 | 2.57 | 65  | 1.50 | 38 | 11.6    | 5.3  |
| 3     | 80  | S3L06  | 3.4  | 86  | 6.22 | 158 | 1.81 | 46 | 8.15 | 207 | 1.50 | 38 | 5.63 | 143 | .66  | 17 | 3.14 | 80  | 1.50 | 38 | 12.1    | 5.5  |
| 4     | 100 | S3L07  | 4.2  | 107 | 6.93 | 176 | 2.05 | 52 | 8.15 | 207 | 1.50 | 38 | 8.34 | 212 | 1.04 | 27 | 4.14 | 105 | 1.50 | 38 | 18.5    | 8.4  |
| 5     | 125 | S3L08  | 4.7  | 119 | 7.52 | 191 | 2.20 | 56 | 8.15 | 207 | 1.50 | 38 | 9.40 | 239 | 1.46 | 37 | 5.13 | 130 | 1.50 | 38 | 22.9    | 10.4 |

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2018 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. [www.flomatic.com](http://www.flomatic.com)



Page 2 of 2  
February 13, 2018  
Dwg No: SS3L04 Rev: 0

FLOMATIC CORPORATION  
GLENS FALLS, N.Y. 12801  
PHONE (518) 761-9797  
FAX (518) 761-9798



# Wafer Check Valve      Silent Check      Model 888

Sizes 2", 3" , 4" & 5" / 50 mm, 80mm, 100mm & 125 mm

**FLOMATIC®**  
Flomatic Corporation



## Materials (Ductile Iron Body)

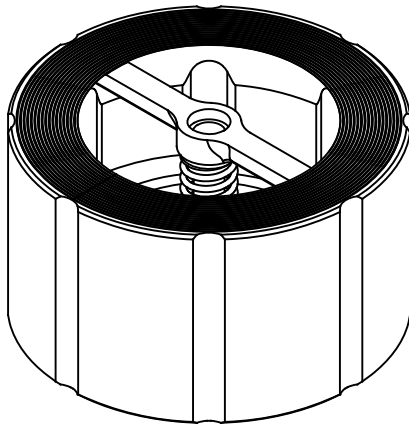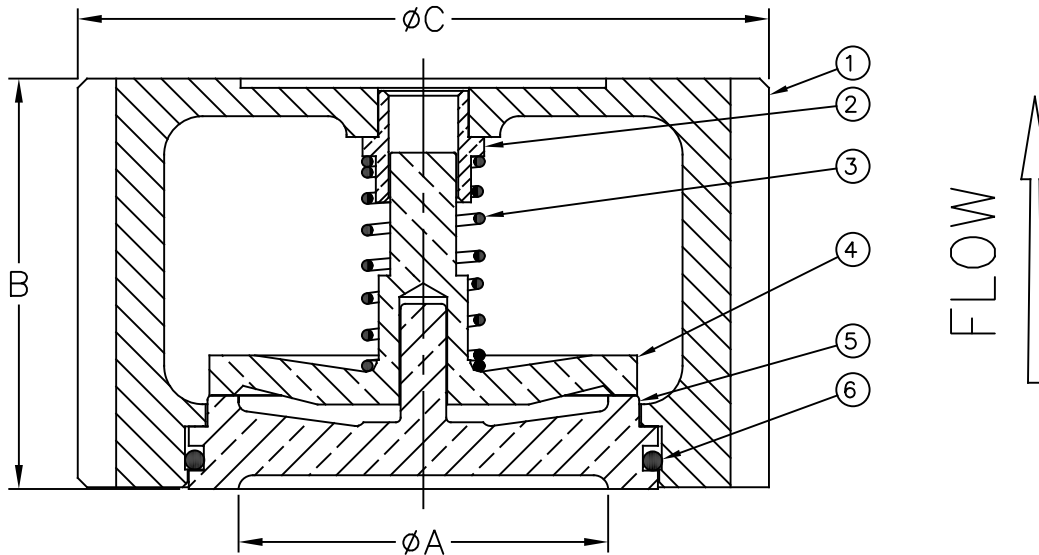

| Item # | Qty | Description         | Material        | ASTM          |
|--------|-----|---------------------|-----------------|---------------|
| 1      | 1   | Body (Epoxy Coated) | Ductile Iron    | A536 65-45-12 |
| 2      | 1   | Bushing             | Bronze          | C95400        |
| 3      | 1   | Spring              | Stainless Steel | 302           |
| 4      | 1   | Poppet              | Silicon Brass   | C87800        |
| 5      | 1   | Seat Ring*          | Silicon Brass   | C87800        |
| 6      | 1   | O'Ring              | EPDM            | 5778-70       |

\*OPTIONAL RESILIENT SEAT AVAILABLE, ADD "R" TO THE PART NUMBER

Max Temp 250°F (121°C)

Max Inlet Pressure @ 150° F (65°C) 150# 300 psi (21bar)

Max Inlet Pressure @ 150° F (65°C) 300# 500 psi (34bar)

5" VALVE IS NOT NSF APPROVED

PATENT # 6,024,121

## Dimensions

| Size |     | Part # | A       |     | B     |     | C     |     | Weight |      | # of Bolts |      | Bolt Size by Flange |             |
|------|-----|--------|---------|-----|-------|-----|-------|-----|--------|------|------------|------|---------------------|-------------|
| inch | mm  |        | inch    | mm  | inch  | mm  | inch  | mm  | lbs    | kg   | 150#       | 300# | 150#                | 300#        |
| 2    | 50  | 2434   | 2-13/32 | 61  | 2-5/8 | 67  | 4-1/4 | 108 | 5      | 2.5  | 4          | 8    | 5/8 x 5-1/4         | 5/8 x 5-1/2 |
| 3    | 80  | 2435   | 3-1/4   | 83  | 3-1/8 | 79  | 5-3/4 | 146 | 11     | 5    | 4          | 8    | 5/8 x 6-1/4         | 3/4 x 7     |
| 4    | 100 | 2436   | 4-3/8   | 111 | 4     | 102 | 7     | 178 | 18     | 8    | 8          | 8    | 5/8 x 7             | 3/4 x 8     |
| 5    | 125 | 2433   | 5-1/4   | 133 | 4-3/4 | 121 | 8-3/8 | 213 | 25     | 11.5 | 8          | 8    | 3/4 x 7-3/4         | 3/4 x 9     |

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2019 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. [www.flomatic.com](http://www.flomatic.com)

**FLOMATIC® VALVES**

April 4, 1995  
Dwg No: S888-1 Rev W (7/19)

FLOMATIC CORPORATION  
GLENS FALLS, N.Y. 12801  
PHONE (518) 761-9797  
FAX (518) 761-9798

# Silent Check Valve


## Seating Detail

**FLOMATIC®**


Models 888R,STR,S6R & 402BTR,STR, S6R

**Flomatic Corporation**


### Materials

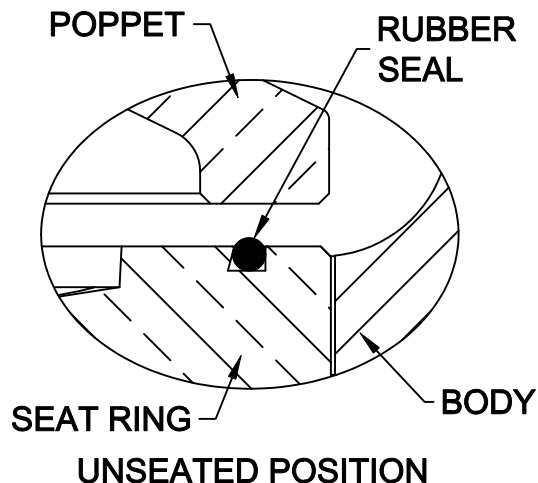

PROVIDES DRIP-TIGHT SEATING AT LOW PRESSURES WITHOUT DAMAGE TO SEAL AT HIGHER PRESSURES.

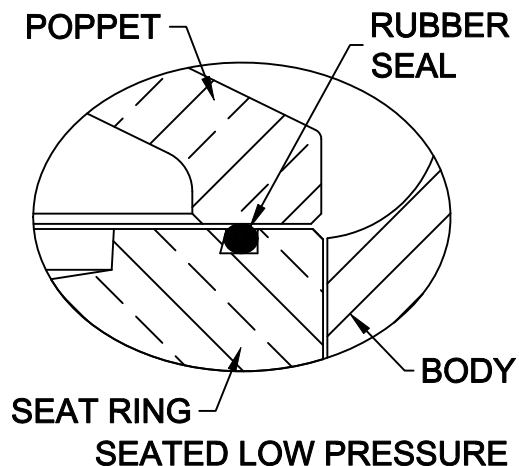

THE UNIQUE SEATING ACTION STARTS WITH INITIAL CONTACT BETWEEN THE POPPET AND SEAL. AS PRESSURE INCREASES, THE SEAL IS COMPRESSED AND ALLOWS THE POPPET TO MAKE CONTACT WITH THE SEAT RING. THIS PREVENTS ANY FURTHER COMPRESSION OF THE SEAL.

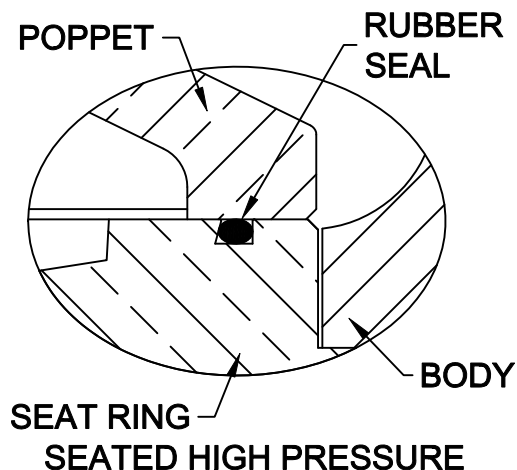

THE SEATING ACTION PROVIDES BOTH, DRIP-TIGHT SEATING AT LOW PRESSURE AND METAL-TO-METAL SEATING WITH SEAL SUPPORT FOR HIGHER PRESSURES.

EPDM SEAL  
**Patent # 6,024,121**

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.

**FLOMATIC® VALVES**

June 25, 2004  
Dwg No:402BTR Rev F (7/15)

FLOMATIC CORPORATION  
GLENS FALLS, N.Y. 12801  
PHONE (518) 761-9797  
FAX (518) 761-9798

# Wafer Check Valve


# Headloss Chart

Model 888/888R

**FLOMATIC®**

Flomatic Corporation

Sizes 2" thru 10" / 50 mm thru 250 mm

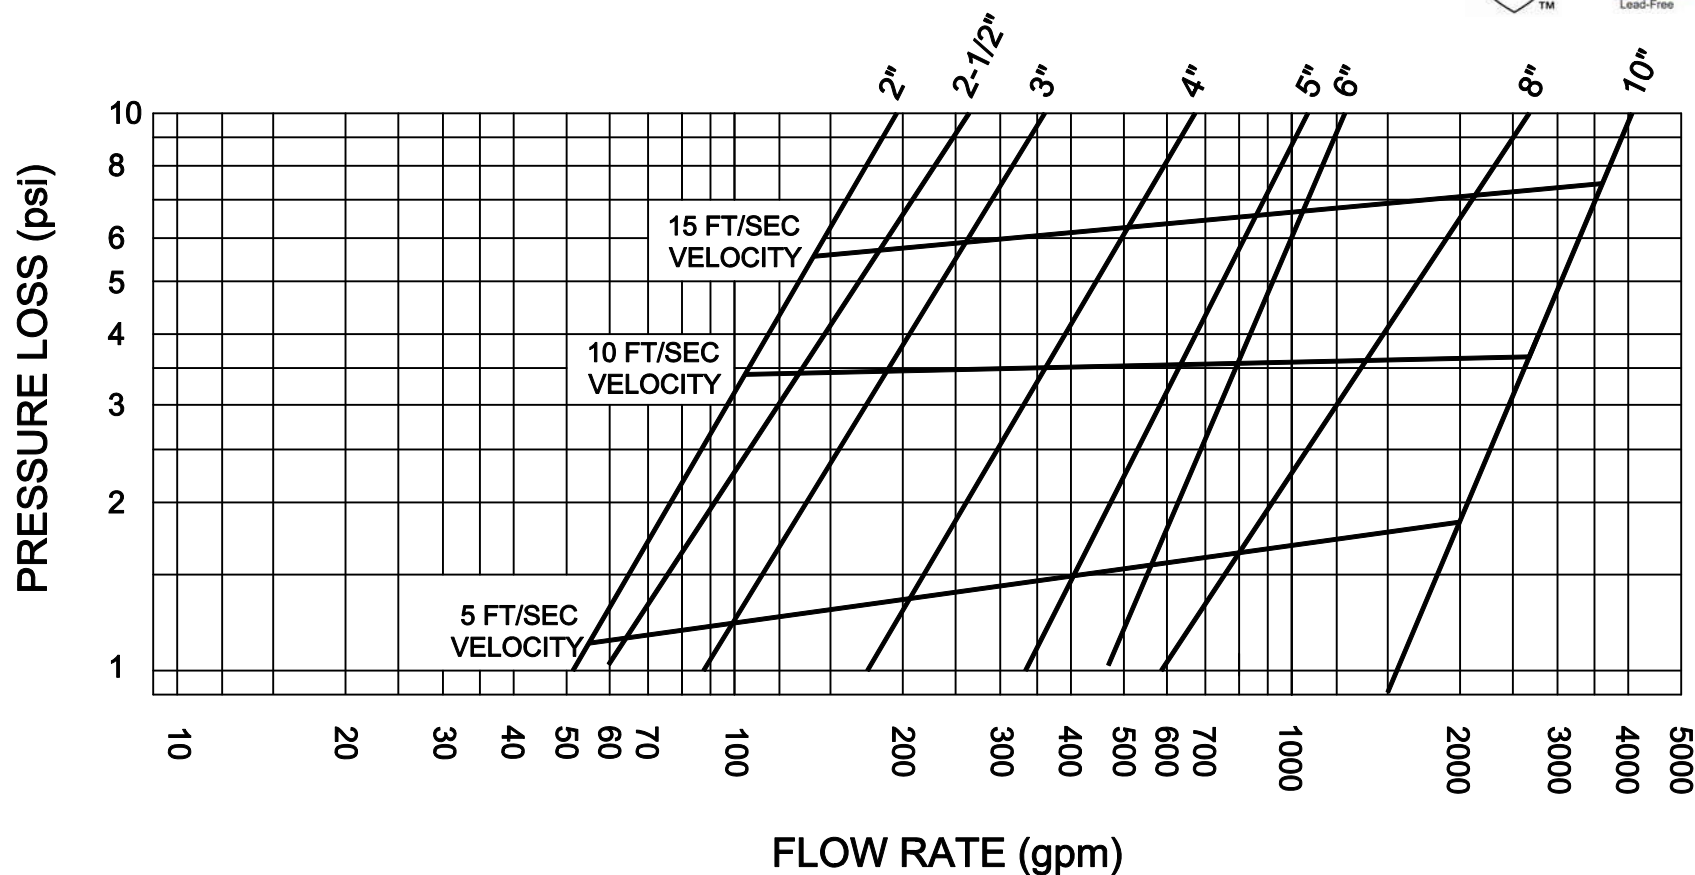

PATENT # 6,024,121

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.

**FLOMATIC® VALVES**

December 28, 1994  
Dwg No: S888HL Rev: E (6/13)

FLOMATIC CORPORATION  
GLENS FALLS, N.Y. 12801  
PHONE (518) 761-9797  
FAX (518) 761-9798

# D80 Series

Dry or Liquid Filled • Stainless Steel Case

UTILITY GAUGES



D82LFB shown

- ▶ 1 1/2", 2", 2 1/2", 4" Dial Sizes
- ▶ ±1.6% Accuracy (1% Optional)
- ▶ Stainless Steel Case
- ▶ Glycerine Fill Standard

The Trerice **D80 Series** Industrial Gauge is designed for rugged performance requirements at an economical cost. This liquid filled gauge is furnished with a stainless steel case and crimped ring. Wetted parts are either bronze tube with Lead-Free (PBF) brass socket or stainless steel.

- Optional features and case style variations available: Please consult the Options & Accessories Section for details.
- For correct use and application of all pressure gauges, please refer to: Pressure Gauge Standard ASME B40.100.

## Specifications

| Models |                 | Wetted Parts                                        |
|--------|-----------------|-----------------------------------------------------|
| D82B   | (dry)           | Bronze tube, brass socket                           |
| D82LFB | (liquid filled) | Lead-Free (PBF) Meets NSF/ANSI Standards 372 and 61 |

|         |                 |                                   |
|---------|-----------------|-----------------------------------|
| D83SS   | (dry)           | 316 Stainless steel tube & socket |
| D83LFSS | (liquid filled) |                                   |

|            |                        |
|------------|------------------------|
| Dial Sizes | 1 1/2", 2", 2 1/2", 4" |
|------------|------------------------|

|      |                                                                   |
|------|-------------------------------------------------------------------|
| Fill | Glycerine, other fills available<br>See Optional Features Section |
|------|-------------------------------------------------------------------|

|          |                                        |
|----------|----------------------------------------|
| Movement | D82: Brass<br>D83: 316 Stainless steel |
|----------|----------------------------------------|

|            |                                                                |
|------------|----------------------------------------------------------------|
| Connection | Lower male or center back male, (Lower back male 4" Dial only) |
|------------|----------------------------------------------------------------|

|      |                                              |
|------|----------------------------------------------|
| Case | 304 stainless steel, stem-mounted flangeless |
|------|----------------------------------------------|

|      |                             |
|------|-----------------------------|
| Ring | Crimped 304 stainless steel |
|------|-----------------------------|

|        |         |
|--------|---------|
| Window | Acrylic |
|--------|---------|

|         |                       |
|---------|-----------------------|
| Pointer | Plain, black finished |
|---------|-----------------------|

|           |                                                                |
|-----------|----------------------------------------------------------------|
| Dial Face | Aluminum, white background with black graduations and markings |
|-----------|----------------------------------------------------------------|

|          |                                                 |
|----------|-------------------------------------------------|
| Accuracy | ±1.6% Full Scale<br>(1% available as an option) |
|----------|-------------------------------------------------|

|                     |              |
|---------------------|--------------|
| Maximum Temperature | 150°F (65°C) |
|---------------------|--------------|

### Approximate Shipping Weight

- 1 1/2" Dial Size:  
0.4 lbs [0.18 kg]
- 2" Dial Size:  
0.4 lbs [0.18 kg]
- 2 1/2" Dial Size:  
0.5 lbs [0.23 kg]
- 4" Dial Size:  
1.0 lbs [0.45 kg]

## HOW TO ORDER

Sample Order Number: **D82LFB 25 02 L A 110**

| Model   | Dial Size | Connection Size | Connection Location | Units of Measure | Range Code          |
|---------|-----------|-----------------|---------------------|------------------|---------------------|
| D82LFB  | 15 1 1/2" | 01 1/8 NPT*     | L Lower             | A psi            | See Standard Ranges |
| D83LFSS | 20 2"     | 02 1/4 NPT**    | B Back              | D psi/kPa        |                     |
| D82B    | 25 2 1/2" | 04 1/2 NPT***   |                     |                  |                     |
| D83SS   | 40 4"     |                 |                     |                  |                     |

\* 1/8 NPT connection size not available with 4" dial size.

\*\* 1/4 NPT connection size not available with 1 1/2" dial size.


\*\*\* 1/2 NPT connection size only available with 4" dial size.

# D80 Series

## Dry or Liquid Filled • Stainless Steel Case

All dimensions are nominal. Dimensions in [ ] are in millimeters.

UTILITY GAUGES

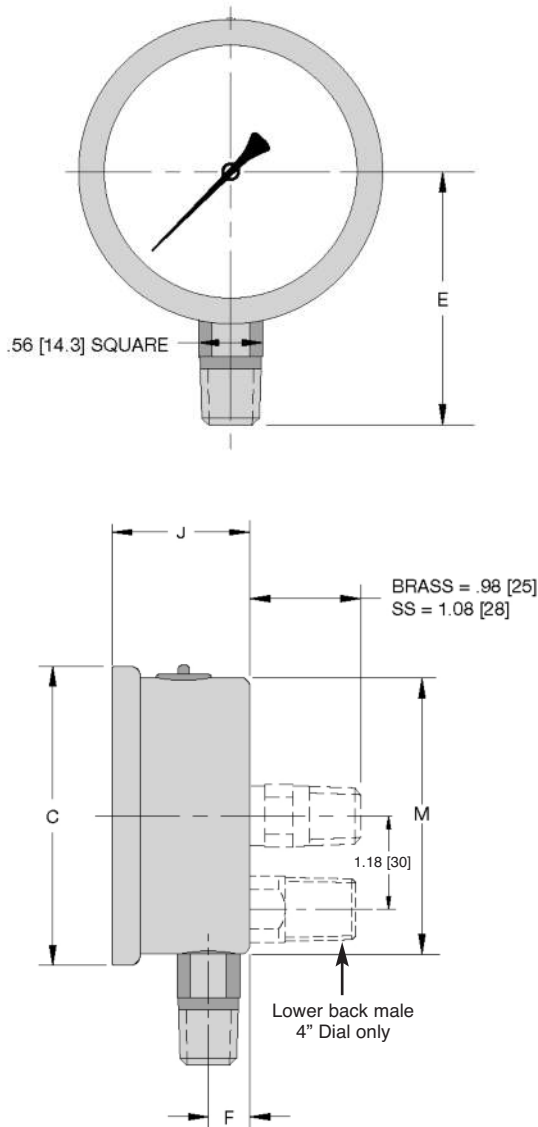

### Standard Ranges

| psi Ranges (A) |                      | D82              |                 | D83              |                 |
|----------------|----------------------|------------------|-----------------|------------------|-----------------|
| Range Code     | Specific Range (psi) | Figure Intervals | Minor Divisions | Figure Intervals | Minor Divisions |
| 010            | 30" Hg to 0          | 5                | 0.5             | 5                | 0.5             |
| 020            | 30" Hg to 15 psi     | 10/5             | 1/0.5           | 10/5             | 1/0.5           |
| 030            | 30" Hg to 30 psi     | 10/5             | 1/1             | 10/5             | 1/1             |
| 040            | 30" Hg to 60 psi     | 10/10            | 2/1             | 10/10            | 2/1             |
| 050            | 30" Hg to 100 psi    | 30/20            | 2/2             | 30/20            | 2/2             |
| 060            | 30" Hg to 150 psi    | 30/30            | 5/2             | 30/30            | 5/2             |
| 070            | 30" Hg to 300 psi    | 30/50            | 5/5             | 30/50            | 5/5             |
| 080            | 0 to 15 psi          | 3                | 0.2             | 3                | 0.2             |
| 090            | 0 to 30 psi          | 5                | 0.5             | 5                | 0.5             |
| 100            | 0 to 60 psi          | 10               | 1               | 10               | 1               |
| 110            | 0 to 100 psi         | 10               | 1               | 10               | 1               |
| 120            | 0 to 160 psi         | 20               | 2               | 20               | 2               |
| 130            | 0 to 200 psi         | 20               | 2               | 20               | 2               |
| 140            | 0 to 300 psi         | 50               | 5               | 50               | 5               |
| 150            | 0 to 400 psi         | 50               | 5               | 50               | 5               |
| 160            | 0 to 600 psi         | 100              | 10              | 100              | 10              |
| 180            | 0 to 1000 psi        | 100              | 20              | 100              | 20              |
| 190            | 0 to 1500 psi        | 300              | 20              | 300              | 20              |
| 200            | 0 to 2000 psi        | 200              | 20              | 200              | 20              |
| 210            | 0 to 3000 psi        | 500              | 50              | 500              | 50              |
| 220            | 0 to 5000 psi        | 1000             | 100             | 1000             | 100             |

Ranges over 5000 PSI are not available on D82LFB.

|     |                |     |     |      |     |
|-----|----------------|-----|-----|------|-----|
| 230 | 0 to 10000 psi | N/A | N/A | 2000 | 200 |
| 240 | 0 to 15000 psi | N/A | N/A | 3000 | 200 |

For dual scale ranges specify the appropriate **Units of Measure: D** (psi/kPa) followed by the corresponding **A** (psi) **Range Code**

| Dial Size  | C          | E          | F         | J         | M          |
|------------|------------|------------|-----------|-----------|------------|
| 1 1/2" D82 | 1.85 [47]  | 1.50 [38]  | 0.32 [8]  | 1.06 [27] | 1.61 [41]  |
| 1 1/2" D83 | 1.85 [47]  | 1.50 [38]  | 0.32 [8]  | 1.06 [27] | 1.61 [41]  |
| 2" D82     | 2.28 [58]  | 1.89 [48]  | 0.39 [10] | 1.14 [29] | 2.05 [52]  |
| 2" D83     | 2.28 [58]  | 2.05 [52]  | 0.35 [9]  | 1.18 [30] | 2.05 [52]  |
| 2 1/2" D82 | 2.68 [68]  | 2.24 [57]  | 0.39 [10] | 1.18 [30] | 2.44 [62]  |
| 2 1/2" D83 | 2.68 [68]  | 2.32 [59]  | 0.51 [13] | 1.38 [35] | 2.44 [62]  |
| 4" D82     | 4.29 [109] | 3.07 [78]  | 0.47 [12] | 1.42 [36] | 3.90 [99]  |
| 4" D83     | 4.29 [109] | 3.94 [100] | 0.75 [19] | 1.93 [49] | 3.94 [100] |

# Data sheet

# MBS 3000 pressure transmitter for industrial applications

## Introduction




- Designed for use in severe industrial environments
- Enclosure and wetted parts of acid-resistant stainless steel (AISI 316L)
- All standard output signals: 4-20 mA, 0-5 V, 1-5 V, 1-6 V, 0-10 V
- A wide range of pressure and electrical connections
- Temperature compensated and laser calibrated
- Typical applications:
  - Pumps
  - Compressors
  - Pneumatics
  - Water treatment

## Dimensions

### Ordering

|                     |                                    |                                  |                             |                                       |                 |                    |
|---------------------|------------------------------------|----------------------------------|-----------------------------|---------------------------------------|-----------------|--------------------|
| Type code<br>Page 4 | 8                                  | 2                                | 5                           | 7                                     | 1               | 3                  |
|                     | AMP Superseal<br>1.5 series (male) | AMP Econoseal<br>J series (male) | IEC 947-5-2<br>M12x1, 4-pin | ISO 15170-A1-3.2-Sn<br>(Bayonet plug) | DIN 43650, Pg 9 | 2 m screened cable |

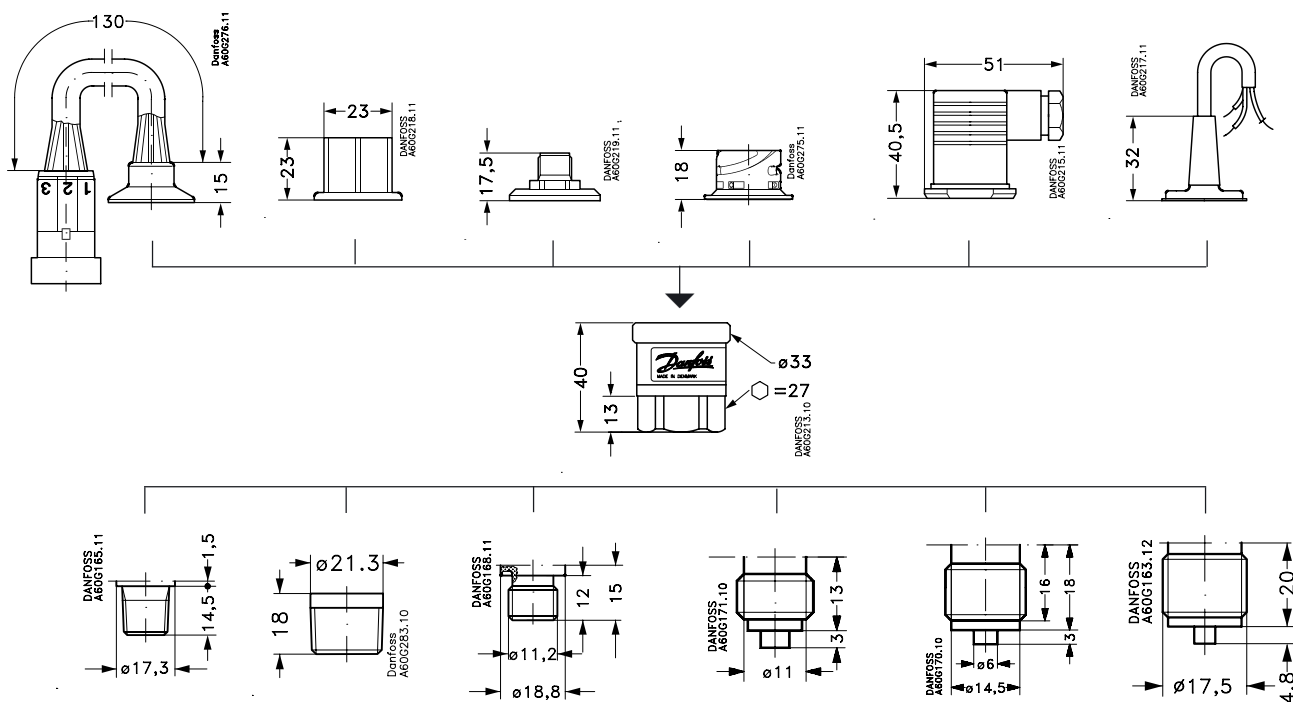

### Ordering

|                     |              |              |                                           |                     |                     |                     |
|---------------------|--------------|--------------|-------------------------------------------|---------------------|---------------------|---------------------|
|                     | 1/4 - 18 NPT | 1/2 - 14 NPT | DIN 3852-E-G1/4<br>Gasket:<br>DIN 3869-14 | G 1/4 A<br>(EN 837) | G 3/8 A<br>(EN 837) | G 1/2 A<br>(EN 837) |
| Type code<br>page 4 | AC04         | AC08         | GB04                                      | AB04                | AB06                | AB08                |

## Technical data

### Main specifications

|                        |             |               |               |              |              |               |               |        |
|------------------------|-------------|---------------|---------------|--------------|--------------|---------------|---------------|--------|
| Pressure connections   | see page 1  |               |               |              |              |               |               |        |
| Measuring ranges [bar] | 0-1<br>0-25 | 0-1.6<br>0-40 | 0-2.5<br>0-60 | 0-4<br>0-100 | 0-6<br>0-160 | 0-10<br>0-250 | 0-16<br>0-400 | 0-600  |
| Output signals         | 4-20 mA     |               | 0-5 V         |              | 1-5 V        |               | 1-6 V         | 0-10 V |
| Electrical connections | see page 3  |               |               |              |              |               |               |        |

### Performance (IEC 770)

|                                        |                                                |
|----------------------------------------|------------------------------------------------|
| Accuracy                               | ±0.5% FS (typ.)<br>±1% FS (max.)               |
| Non-linearity (best fit straight line) | ≤ ±0.5% FS                                     |
| Hysteresis and repeatability           | ≤ ±0.1% FS                                     |
| Thermal zero point shift               | ≤ ±0.1% FS/10K (typ.)<br>≤ ±0.2% FS/10K (max.) |
| Thermal sensitivity (span) shift       | ≤ ±0.1% FS/10K (typ.)<br>≤ ±0.2% FS/10K (max.) |
| Response time                          | < 4 ms                                         |
| Overload pressure                      | 6 × FS (max. 1500 bar)                         |
| Burst pressure                         | 6 × FS (max. 2000 bar)                         |
| Durability, P: 10-90% FS               | >10×10 <sup>6</sup> cycles                     |

### Electrical specifications

|                                                             | Nom. output signal (short-circuit protected) |                        |                        |
|-------------------------------------------------------------|----------------------------------------------|------------------------|------------------------|
|                                                             | 4 – 20 mA                                    | 0-5, 1-5, 1-6 V d.c.   | 0-10 V d.c.            |
| Supply voltage [U <sub>B</sub> ], polarity protected        | 9 → 32 V d.c.                                | 9 → 30 V d.c.          | 15 → 30 V d.c.         |
| Supply - current consumption                                | -                                            | ≤ 5 mA                 | ≤ 8 mA                 |
| Supply voltage dependency                                   | ≤ ±0.05% FS/10 V                             |                        |                        |
| Current limitation<br>(linear output up to 1.5x nom. range) | 34 mA (typ.)                                 | -                      |                        |
| Output impedance                                            | -                                            | ≤ 25Ω                  |                        |
| Load [R <sub>L</sub> ] (load connected to 0V)               | R <sub>L</sub> ≤ (U <sub>B</sub> -9V)/0.02   | R <sub>L</sub> ≥ 10 kΩ | R <sub>L</sub> ≥ 15 kΩ |







### Environmental conditions

|                                                                |                         |                                                  |                        |
|----------------------------------------------------------------|-------------------------|--------------------------------------------------|------------------------|
| Medium temperature range                                       |                         |                                                  | -40 → +85°C            |
| Ambient temperature range (depending on electrical connection) |                         |                                                  | see page 3             |
| Compensated temperature range                                  |                         |                                                  | 0 → +80°C              |
| Transport temperature range                                    |                         |                                                  | -50 → +85°C            |
| EMC - Emission                                                 |                         |                                                  | EN 61000-6-3           |
| EMC - Immunity                                                 | Electrostatic discharge | Air mode 8 kV                                    | EN 61000-6-2           |
|                                                                |                         | Contact mode 4 kV                                | EN 61000-6-2           |
|                                                                | RF                      | field 10 V/m, 26 MHz - 1 GHz                     | EN 61000-6-2           |
|                                                                |                         | conducted 10 V <sub>rms</sub> , 150 kHz - 30 MHz | EN 61000-6-2           |
|                                                                | Transient               | burst 4 kV (CM),Clamp                            | EN 61000-6-2           |
|                                                                |                         | surge 1 kV (CM,DM), Rg = 42Ω                     | EN 61000-6-2           |
| Insulation resistance                                          |                         |                                                  | > 100 MΩ at 100 V d.c. |
| Mains frequency test                                           |                         | 500 V, 50 Hz                                     | SEN 361503             |
| Vibration stability                                            | Sinusoidal              | 15.9 mm-pp, 5Hz-25Hz<br>20 g, 25 Hz - 2 kHz      | IEC 60068-2-6          |
|                                                                | Random                  | 7.5 g <sub>rms</sub> , 5 Hz - 1 kHz              |                        |
| Shock resistance                                               | Shock                   | 500 g / 1 ms                                     | IEC 60068-2-27         |
|                                                                | Free fall               |                                                  | IEC 60068-2-32         |
| Enclosure (depending on electrical connection)                 |                         |                                                  | see page 3             |

### Mechanical characteristics

|                                                                     |                        |                               |
|---------------------------------------------------------------------|------------------------|-------------------------------|
| Materials                                                           | Wetted parts           | DIN 17440-1.4404 (AISI 316 L) |
|                                                                     | Enclosure              | DIN 17440-1.4404 (AISI 316 L) |
|                                                                     | Electrical connections | see page 3                    |
| Weight (depending on pressure connection and electrical connection) |                        | 0.2-0.3 kg                    |

**Electrical connections**

| Type code, page 4                                                                                    |                                                                                                                    |                                                                                                        |                                                                                                                         |                                                                                                                        |                                                                                                                              |
|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| 1                                                                                                    | 2                                                                                                                  | 5                                                                                                      | 7                                                                                                                       | 8                                                                                                                      | 3                                                                                                                            |
| DIN 43650, Pg 9<br> | AMP Econoseal J series (male)<br> | IEC 947-5-2 M12x1<br> | ISO 15170-A1-3.2-Sn (Bayonet plug)<br> | AMP Superseal 1.5 series (male)<br> | 2 m screened cable<br>                    |
| <i>Ambient temperature</i>                                                                           |                                                                                                                    |                                                                                                        |                                                                                                                         |                                                                                                                        |                                                                                                                              |
| -40 → + 85 °C                                                                                        | -40 → + 85 °C                                                                                                      | -25 → +85 °C                                                                                           | -40 → +85 °C                                                                                                            | -40 → +85 °C                                                                                                           | -30 → +85 °C                                                                                                                 |
| <i>Enclosure</i>                                                                                     |                                                                                                                    |                                                                                                        |                                                                                                                         |                                                                                                                        |                                                                                                                              |
| IP 65                                                                                                | IP 67                                                                                                              | IP 67                                                                                                  | IP 67 / IP 69K                                                                                                          | IP 67                                                                                                                  | IP67                                                                                                                         |
| <i>Materials</i>                                                                                     |                                                                                                                    |                                                                                                        |                                                                                                                         |                                                                                                                        |                                                                                                                              |
| Glass filled polyamid, PA 6.6                                                                        | Glass filled polyamid, PA 6.6 <sup>1)</sup>                                                                        | Nickel plated brass, CuZn/Ni                                                                           | Glass filled polyester, PBT                                                                                             | Glass filled polyamid, PA 6.6 <sup>2)</sup>                                                                            | Polyolifin cable with PE shrinkage tubing                                                                                    |
| <i>Electrical connection, 4-20 mA output (2 wire)</i>                                                |                                                                                                                    |                                                                                                        |                                                                                                                         |                                                                                                                        |                                                                                                                              |
| Pin 1: +supply<br>Pin 2: ÷supply<br>Pin 3: Not used<br>Earth: Connected to MBS housing               | Pin 1: +supply<br>Pin 2: ÷supply<br>Pin 3: Not used                                                                | Pin 1: +supply<br>Pin 2: Not used<br>Pin 3: Not used<br>Pin 4: ÷supply                                 | Pin 1: +supply<br>Pin 2: ÷supply<br>Pin 3: Ventilation<br>Pin 4: Not used                                               | Pin 1: +supply<br>Pin 2: ÷supply<br>Pin 3: Not used                                                                    | Brown wire: +supply<br>Black wire: ÷supply<br>Red wire: Not used<br>Orange: Not used<br>Screen: Not connected to MBS housing |
| <i>Electrical connection, 0-5V, 1-5V, 1-6V, 0-10V output</i>                                         |                                                                                                                    |                                                                                                        |                                                                                                                         |                                                                                                                        |                                                                                                                              |
| Pin 1: +supply<br>Pin 2: ÷supply<br>Pin 3: Output<br>Earth: Connected to MBS housing                 | Pin 1: +supply<br>Pin 2: ÷supply<br>Pin 3: Output                                                                  | Pin 1: +supply<br>Pin 2: not used<br>Pin 3: Output<br>Pin 4: ÷supply                                   | Pin 1: +supply<br>Pin 2: Output<br>Pin 3: Ventilation<br>Pin 4: ÷supply                                                 | Pin 1: +supply<br>Pin 2: ÷supply<br>Pin 3: Output                                                                      | Brown wire: Output<br>Black wire: ÷supply<br>Red wire: + supply<br>Orange: Not used<br>Screen: Not connected to MBS housing  |

<sup>1)</sup> Female plug: Glass filled polyester, PBT

<sup>2)</sup> Wire: PETFE (teflon)

Protection sleeve: PBT mesh (polyester)

### Ordering of standard MBS 3000 with DIN 43650 plug Pg 9

| Pressure connection | Pressure range<br>Pe | Type                 | Code no. |
|---------------------|----------------------|----------------------|----------|
| G 1/4 A<br>(EN 837) | 0 - 1 bar            | MBS 3000 1011-1 AB04 | 060G1113 |
|                     | 0 - 1.6 bar          | MBS 3000 1211-1 AB04 | 060G1429 |
|                     | 0 - 2.5 bar          | MBS 3000 1411-1 AB04 | 060G1122 |
|                     | 0 - 4 bar            | MBS 3000 1611-1 AB04 | 060G1123 |
|                     | 0 - 6 bar            | MBS 3000 1811-1 AB04 | 060G1124 |
|                     | 0 - 10 bar           | MBS 3000 2011-1 AB04 | 060G1125 |
|                     | 0 - 16 bar           | MBS 3000 2211-1 AB04 | 060G1133 |
|                     | 0 - 25 bar           | MBS 3000 2411-1 AB04 | 060G1430 |
|                     | 0 - 40 bar           | MBS 3000 2611-1 AB04 | 060G1105 |
|                     | 0 - 60 bar           | MBS 3000 2811-1 AB04 | 060G1106 |
|                     | 0 - 100 bar          | MBS 3000 3011-1 AB04 | 060G1107 |
|                     | 0 - 160 bar          | MBS 3000 3211-1 AB04 | 060G1112 |
|                     | 0 - 250 bar          | MBS 3000 3411-1 AB04 | 060G1111 |
|                     | 0 - 400 bar          | MBS 3000 3611-1 AB04 | 060G1109 |
|                     | 0 - 600 bar          | MBS 3000 3811-1 AB04 | 060G1110 |

### Ordering of special versions

#### MBS 3000

#### Measuring range

|                   |     |
|-------------------|-----|
| 0 - 1 bar .....   | 1 0 |
| 0 - 1.6 bar ..... | 1 2 |
| 0 - 2.5 bar ..... | 1 4 |
| 0 - 4 bar .....   | 1 6 |
| 0 - 6 bar .....   | 1 8 |
| 0 - 10 bar .....  | 2 0 |
| 0 - 16 bar .....  | 2 2 |
| 0 - 25 bar .....  | 2 4 |
| 0 - 40 bar .....  | 2 6 |
| 0 - 60 bar .....  | 2 8 |
| 0 - 100 bar ..... | 3 0 |
| 0 - 160 bar ..... | 3 2 |
| 0 - 250 bar ..... | 3 4 |
| 0 - 400 bar ..... | 3 6 |
| 0 - 600 bar ..... | 3 8 |

#### Pressure reference

|                       |   |
|-----------------------|---|
| Gauge (relativ) ..... | 1 |
| Absolute .....        | 2 |

|             |                   |
|-------------|-------------------|
| A B 0 4 ... | G 1/4 A (EN 837)  |
| A B 0 6 ... | G 3/8 A (EN 837)  |
| A B 0 8 ... | G 1/2 A (EN 837)  |
| A C 0 4 ... | 1/4 -18 NPT       |
| A C 0 8 ... | 1/2-14 NPT        |
| G B 0 4 ... | DIN 3852-E-G 1/4, |

#### Pressure connection(see page 1)

Gasket: DIN 3869-14 NBR

#### Electrical connection (see pages 1 and 3)

Plug, DIN 43650, Pg 9  
 \*) Plug, AMP Econoseal, J series, male, excl. female plug  
 Screened cable, 2 m  
 \*) Plug, IEC 947-5-2, M12 x 1, male, excl. female plug  
 Plug ISO 15170-A1-3.2-Sn, male, excl. female plug  
 \*) Plug, AMP Superseal 1.5 series male, excl. female plug

\*) Gauge versions only available as sealed gauge versions

#### Output signal

|   |           |
|---|-----------|
| 1 | 4 - 20 mA |
| 2 | 0 - 5 V   |
| 3 | 1 - 5 V   |
| 4 | 1 - 6 V   |
| 5 | 0 - 10 V  |

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.

# Grundfos CU 352 Pump Controller

Advanced pump system controller for parallel connected pumps for HVAC and Pressure Boosting Applications



## Compatibility

The CU 352 pump controller can control up to six (6) parallel connected pumps in the following manner:

- Direct BUS control: **CRE, CME, VLSE** or **LCSE** pumps
- Direct BUS control: Pumps with Grundfos **CUE** drives
- Digital/Analog control: Pumps with external drives (requires **IO 351B** Input/Output module)

## HVAC Control Modes

- o Constant Differential Pressure control via remote sensor
- Multi-zone Differential Pressure control up to 6 zones
  - Priority, Minimum or Energy Saving Mode
- o Quadratic, proportional or constant differential pressure control via local sensor
  - Adjustable control curve (Max flow and control head)
  - Efficiency based sequencing automatically updated
- o Constant Flow
- o Constant Temperature
- o Constant Differential Temperature

## Pressure Boosting Control Modes

- o Constant Pressure (pump discharge)
- o Quadratic or Proportional discharge pressure
  - Adjustable control curve (Max flow and min. static head)
- o Constant Pressure (remote sensor)

## Pump Cascade Control

- o Efficiency based pump sequencing
  - \* Updated automatically when setpoint and/or control head are changed
- o Automatic Pump alternation (run hour based)
- o Standby Pumps (single or multiple)
- o Adjustable minimum time between starts / stops
- o Adjustable maximum starts per hour
- o Pump test run (exercise idle pumps)
- o Clock program
- o Proportional Gain and Integral Time adjustment

## Application optimized functions:

- o Secondary (Fallback) Sensor
- o Pump curve data (5th or 2nd order polynomial)
  - \* Pre-programmed from factory
- o Flow estimation via pump curve data and pressure measurement across pump(s)
- o Reduced operation (generator backup power)
  - Max. kW limit or max. number of pumps
- o Specific energy calculation (kWh per unit volume)
  - \*requires flow sensor input
- o Low Flow Stop (Pressure Boosting)
  - Adjustable low flow setting: Energy saver mode, medium flow or high comfort level


## Protection and Monitoring

- o Check valve failure detection (MLE motors)
- o Pump outside duty range protection
  - \*keeps all operating pumps on their curve
- o Low suction pressure warning and alarm
- o Primary sensor failure reaction setting
- o Soft pressure build-up (Pipe fill mode)
- o Low system pressure warning and alarm
- o High system pressure shutdown
- o Alarm log, last 24, time stamped
- o Data log graph (20 - 3600 samples/hour)
  - (Flow, speed, setpoint, sensor feedback, kW)
- o BMS/EMS communication (see page 4)

Page 2

# Grundfos CU 352 Pump Controller

## CU 352 Control user interface

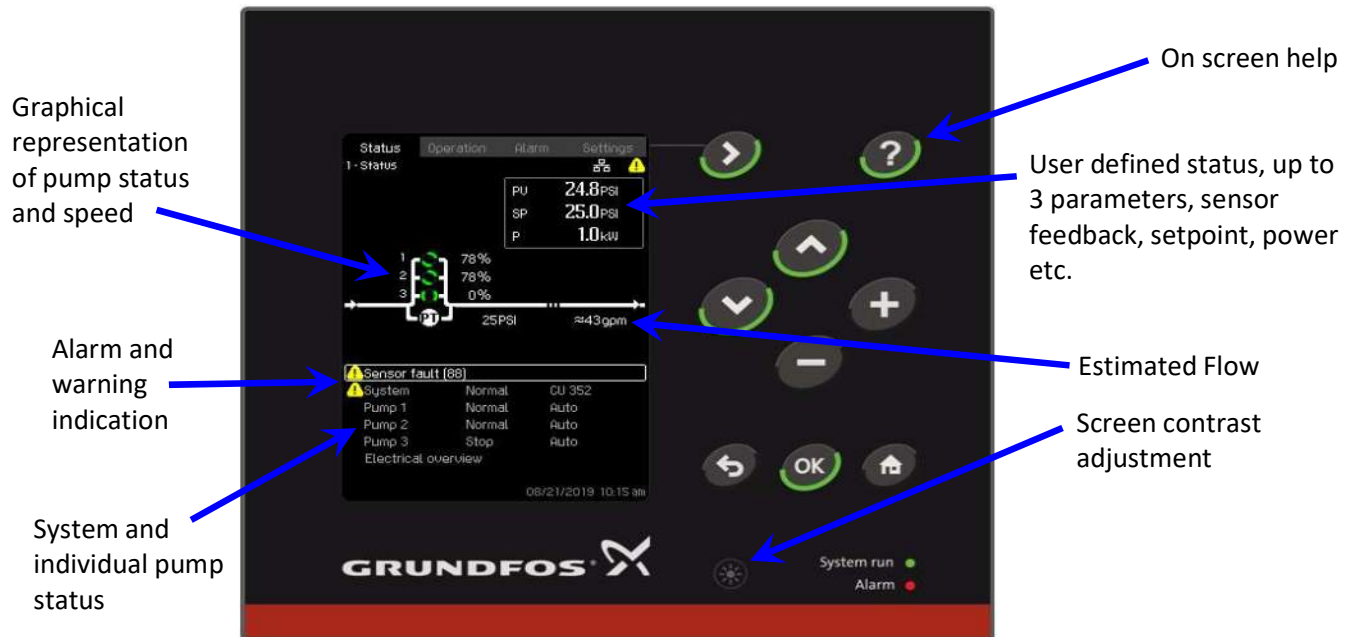

### Status of inputs and outputs

#### Electrical overview

Shows status of inputs along with wiring landing points [in brackets]

| Status                           | Operation | Alarm | Settings |
|----------------------------------|-----------|-------|----------|
| 1.11.1 - Analog inputs           |           |       |          |
| Analog inputs and measured value |           |       |          |
| AI1 (CU 352), [51]               |           |       | 35PSI    |
| (Diff. pressure, pump, high)     |           |       | 7.9mA    |
| AI2 (CU 352), [54]               |           |       | 35PSI    |
| (Diff. pressure, pump, low)      |           |       | 7.9mA    |
| AI3 (CU 352), [57]               |           |       | 0PSI     |
| (Diff. pressure, external)       |           |       | 0.0mA    |

| Status                   | Operation | Alarm | Settings   |
|--------------------------|-----------|-------|------------|
| 1.11.2 - Digital inputs  |           |       |            |
| DI1 (CU 352), [10]       |           |       | Active     |
| (External start/stop)    |           |       |            |
| DI2 (CU 352), [12]       |           |       | Not active |
| (Reduced operation)      |           |       |            |
| DI3 (CU 352), [14]       |           |       |            |
| (Alternative setpoint 2) |           |       |            |
| DI1 (IO 351-41), [10]    |           |       |            |
| (Not used)               |           |       |            |

### Alarms and warnings

**Alarm log** - Stores last 24 alarms and warnings.

- > Time event occurred
- > Time event cleared
- > Alarm code for more detailed description.

| Status                         | Operation  | Alarm    | Settings |
|--------------------------------|------------|----------|----------|
| 3.2 - Alarm log                |            |          |          |
| AI3-CU352                      |            |          |          |
| Sensor fault (88)              |            |          |          |
| Occurred at                    | 08/21/2019 | 10:12 am |          |
| Disappeared at                 | --         | --       |          |
| System                         |            |          |          |
| Water shortage (214)           |            |          |          |
| Occurred at                    | 08/21/2019 | 8:54 am  |          |
| Disappeared at                 | 08/21/2019 | 8:55 am  |          |
| System                         |            |          |          |
| Water shortage (214)           |            |          |          |
| Occurred at                    | 08/21/2019 | 8:54 am  |          |
| Disappeared at                 | 08/21/2019 | 8:55 am  |          |
| System                         |            |          |          |
| Pumps outside duty range (208) |            |          |          |
| Occurred at                    | 08/21/2019 | 8:54 am  |          |
| Disappeared at                 | 08/21/2019 | 8:54 am  |          |

### Startup Wizard

#### Startup Wizard

Step by Step installation guide

- > Set time and date format
- > Remove air/Prime pumps
- > Check pump rotation
- > Set primary sensor

| Step-by-step installation guide                                                                                                    |  |  |  |
|------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| 17/26 - Priming sequence                                                                                                           |  |  |  |
| Close the valve on the outlet side of all the pumps.                                                                               |  |  |  |
| Prime all pumps and make sure that the suction manifold and the suction pipes are primed as well.                                  |  |  |  |
| Make sure that a correctly sized diaphragm tank has been installed, if necessary, and that the tank precharge pressure is correct. |  |  |  |
| Press [ok] to go to the next page.                                                                                                 |  |  |  |
| Go to next page                                                                                                                    |  |  |  |

# Grundfos CU 352 Pump Controller

## Sequence of operation

### Hydronic Circulation

The system controller shall operate equal capacity variable speed pumps to maintain a variable (quadratic or linear) or constant differential pressure. The system controller shall receive an analog signal [4-20mA] from a remote or pump system mounted differential pressure sensor. The controller shall be able to receive a system suction pressure and system discharge pressure to determine the system differential pressure (two independent analog signals). The controller shall have the means to protect pumps against dry running via a user defined low suction pressure setting.

### Pressure Boosting

The system controller shall operate equal capacity variable speed pumps to maintain a constant or variable (quadratic or linear) pressure. The system controller shall receive an analog signal [4-20mA] from a remote or pump system mounted pressure sensor. The controller shall be capable of simulating the effect of a remote mounted pressure sensor by quadratically reducing the system discharge pressure setpoint as a function of reduced flow (friction loss compensation).

### Cascade Control

#### Standard Cascade Control (Pumping Efficiency Based):

The pump system controller shall adjust pump speed as necessary to maintain system set-point pressure as flow demand changes. The pump system controller shall start additional pumps upon determination of an increase in efficiency utilizing factory programmed (5th order polynomial) curve data. When the system pressure is equal to the system set-point, all pumps in operation shall reach equal operating speeds. The pump system controller shall have field adjustable Proportional gain and Integral time (PI) settings for system optimization.

#### Optional Cascade Control (Pump Start Speed Based):

As flow demand increases the pump speed shall be increased to maintain the system set-point pressure. When the operating pump(s) reach the programable start speed, an additional pump will be started and will increase speed until the system set-point is achieved. When the system pressure is equal to the system set-point, all pumps in operation shall reach equal operating speeds. The pump system controller shall have field adjustable Proportional gain and Integral time (PI) settings for system optimization.

#### Pumps outside duty range (End of curve protection):

When the pumps are outside their allowable operating range, the controller shall switch on an additional pump, distributing a reduced flow through all pumps in operation moving each pump back into its allowable operating region.

### Pump Alternation

All pumps in the system shall alternate automatically based on demand, time and fault. If flow demand is continuous with only one pump in operation, the system controller shall have the capability to alternate the pumps every 24 hours, every 48 hours or once per week. The interval and actual time of the pump change-over shall be field adjustable.

### Low Flow Stop (Pressure Boosting)

The system controller shall be capable of detecting low flow allowing for pumps to be switched off in an energy saving mode. Upon detection of low flow, the controller shall increase the system setpoint by 5% (adjustable) to store water in a diaphragm or bladder tank and switch off. The pump shall remain off until the system pressure falls 5% below the system setpoint (adjustable). If system flow is still low when the pump switches back on, the pump shall refill the diaphragm tank to 5% above setpoint and switch off again. If system flow increases above the low flow setting, the pump shall return to normal constant pressure mode maintaining the system setpoint.

# Grundfos CU 352 Pump Controller

## Technical data

### Altitude above sea level

Maximum 6,560 feet (2000 m.)

### Ambient Temperature

During operation: -4°F to +140°F (-20°C to +60°C)

During transportation: -4°F to +140°F (-20°C to +60°C)

- \* At temperatures below 32°F (0°C) the display may react slowly.
- \* The display should not be exposed to direct sunlight

### Relative air humidity

5 to 95%

### Enclosure class

UL type 3R when mounted in the front of a panel with UL type rating 1, 2, 3, 3R, 5, 12, 12K or 13. Overall control panel rating of Type 4/4X available on request.

### Supply voltage

1 x 100-240 VAC +/- 10% 50/60Hz, PE  
(Class 1 equipment)

### Power consumption

Maximum 22 W

### Backup battery

The optional backup battery can keep the CU352 powered during intermittent power outages.

The CU 352 will monitor the following:

- short circuit
- wrong polarity
- defective battery
- battery missing
- low battery voltage

### Digital inputs (3)

|                        |          |
|------------------------|----------|
| Open-circuit voltage   | 24 VDC   |
| Closed-circuit current | 5 mA, DC |
| Frequency range        | 0-4 Hz   |

### Analog inputs (3)

|                           |                         |
|---------------------------|-------------------------|
|                           | 0-20 mA                 |
| Input current and voltage | 4-20 mA                 |
|                           | 0-10 V                  |
| Tolerance                 | ± 3.3 % of full scale   |
| Repetitive accuracy       | ± 1 % of full scale     |
| Input resistance, current | < 250 Ω                 |
| Input resistance, voltage | > 50 kΩ ± 10%           |
|                           | 24 V, 30 mA             |
| Supply to sensor          | short-circuit protected |

### Relay outputs (2)

|                        |              |
|------------------------|--------------|
| Normally open contacts | C, NO        |
| Maximum contact load   | 240 VAC, 2 A |
| Minimum contact load   | 5 VDC, 10 mA |

### Communication protocols

For connection to building management systems, Communication Interface Modules (CIM) can be supplied with the CU 352 controller.

| Protocol     | CIM Type |
|--------------|----------|
| LONworks     | 110      |
| PROFIBUS DP  | 150      |
| PROFINET IO  | 500      |
| Modbus RTU   | 200      |
| Modbus TCP   | 500      |
| BACnet MS/TP | 300      |
| BACnet IP    | 500      |
| Ethernet IP  | 500      |

## MLE

### Product compatibility

- **Multi-stage:** CRE, CRIE, CRNE, MTRE, MTSE, SPKE, CME
- **Single-stage:** TPE2, TPE3, VLSE, LCSE
- **Systems:** Hydro MPC-E, Hydro Multi-E, Hydro Multi-B, Hydro Solo-E, CMBE home booster.



TM06 5684 2219

MLE is a dedicated motor-drive system for pumps and other applications. Pumps equipped with MLE motors overcome application challenges and save energy in a variety of pump installations in order to reach the lowest Life Cycle Cost (LCC) possible.

### Integrated drives

Integrated drives are beneficial because they are installed on non-controlled pumps at no additional installation cost. Once the power supply is connected and the pump is fitted into the pipe system, they are ready to operate at the desired setpoint.

Operating pumps with MLE also reduces CAPEX (capital expense) of additional cabinets, components and facility space by having the entire pump system in line with the pipe system.

MLE is the result of Grundfos' efficient motor technology and it is an efficient IE5 motor, with an efficiency much higher than NEMA Premium, which minimizes OPEX (operating expense).

### Robustness throughout the system

The Grundfos full line supply of components, from the power supply to pipe fittings, provides the most robust solutions:

- Built-in protection against power supply disturbances, environment and motor load.
- MLE is designed to mitigate bearing currents.
- No cooling fans in drive (wear part).

### MLE product range

|               |               |
|---------------|---------------|
| 1 x 200-240 V | 0.33 - 2.0 HP |
| 3 x 200-240 V | 1.5 - 7.5 HP  |
| 3 x 440-480 V | 0.33 - 15 HP* |

\* Up to 30 HP available with different specifications.

### Features and benefits

| Feature                                                       | Benefit                                                                                                                                                  |
|---------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Application control</b>                                    |                                                                                                                                                          |
| Control modes                                                 | Easy commissioning to match system design criteria.                                                                                                      |
| Multipump function including alternating, back-up, or cascade | Neglects the need for external controllers and continuous operation by redundant pump and sensor if either component fails.                              |
| Differential pressure or temperature with 2 sensors           | Lower CAPEX by common inexpensive sensor types.                                                                                                          |
| Pump curve adjustments and run at power limit                 | Stabilizes unstable pump curves and extends operating range.                                                                                             |
| Setpoint influence                                            | Adapts QH to internal or measured values.                                                                                                                |
| <b>Energy saving for lower OPEX</b>                           |                                                                                                                                                          |
| AUTOADAPT or FLOWLIMIT                                        | Continuously adapts to the most efficient curve and reduces pressure loss in the system.                                                                 |
| Low-flow stop function                                        | Improved energy optimization and comfort.                                                                                                                |
| ECM motor that exceeds the NEMA Premium efficiency levels     | ECM motors have significantly lower motor loss than NEMA Premium motors. This alone reduces energy consumption by 10 % with a typical pump load profile. |
| <b>Condition monitoring</b>                                   |                                                                                                                                                          |
| Limit Exceed function                                         | Any value can be supervised to protect the system.                                                                                                       |
| Loss of prime and dry run                                     | Protects the shaft seal.                                                                                                                                 |
| Cavitation protection                                         | Protects the impellers.                                                                                                                                  |
| Flow estimate and heat energy monitor                         | Monitoring of the heating system's performance.                                                                                                          |
| Overload and temperature                                      | Protects the frequency converter and motor.                                                                                                              |
| Stop at minimum speed                                         | Protects the pump and saves energy.                                                                                                                      |
| Motor bearings monitors                                       | Ensures uptime by preventive maintenance.                                                                                                                |
| <b>Robustness</b>                                             |                                                                                                                                                          |
| Operating temperature between -4 and +140 °F                  | Allows installation almost anywhere and high margins in control rooms, resulting in longer product service life.                                         |
| Impulse transient resistance (VDE0160 compliant)              | Resistance against lightning, ESD, switching impulses and utility fault clearing.                                                                        |
| Interruptions and voltage sags (SEMIF47 compliant)            | Keeps process running and derates the pump to the available power.                                                                                       |
| Line harmonics resistance (EN 61000-4-13, class 3)            | Built-in compensation of disturbance to avoid overheating of motor windings and maintaining a steady pump operation.                                     |
| Built-in RFI filters                                          | Neglects the need for external components.                                                                                                               |
| NEMA3 / NEMA4 enclosures                                      | Installed in-line to pipe systems at no added cost.                                                                                                      |

## Grundfos iSOLUTIONS

Grundfos iSOLUTIONS delivers the optimal combination of pumps, drives and auxiliary components for the specific application, incorporating special features and functions, and building on application knowledge and experience.

Grundfos iSOLUTIONS allows easy integration of pumps, drives, measurements, controls, protections, and communication, saving you valuable engineering, installation and commissioning time.

To learn more, visit: [www.grundfos.com/isolutions](http://www.grundfos.com/isolutions)

## Sensors

MLE is sensor-independent and controls the pump to any measured feedback.

Grundfos offers several sensors to be used in pump solutions:

- pressure sensors
- temperature sensors
- differential pressure sensors
- differential temperature sensors
- flow meters.

## Grundfos GO Remote

Grundfos GO Remote for iOS and Android ensures easy and quick commissioning, monitoring and servicing of pumps with MLE motors.



TM07 4786 2419

## Technical specifications

| Motor data                    |                                                                                                                                                                                                                                                                                                                                                                                           |                      |                       |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-----------------------|
|                               | Operating range (rpm)                                                                                                                                                                                                                                                                                                                                                                     | Constant power (rpm) | Constant torque (rpm) |
| Speed range                   | 180-2000                                                                                                                                                                                                                                                                                                                                                                                  | 1740-2000            | 900-1740              |
|                               | 360-4000                                                                                                                                                                                                                                                                                                                                                                                  | 3480-4000            | 1750-3480             |
|                               | 360-4000                                                                                                                                                                                                                                                                                                                                                                                  | 3400-4000            | 2000-3400             |
|                               | 500-5900                                                                                                                                                                                                                                                                                                                                                                                  | 4000-5900            | -                     |
| Voltage tolerances            | ± 10 %                                                                                                                                                                                                                                                                                                                                                                                    |                      |                       |
| Frequency                     | 50-60 Hz ± 5 %                                                                                                                                                                                                                                                                                                                                                                            |                      |                       |
| Network                       | TN/TT (optional: IT) according to IEC 60364                                                                                                                                                                                                                                                                                                                                               |                      |                       |
| Environmental limits          |                                                                                                                                                                                                                                                                                                                                                                                           |                      |                       |
| Degree of protection          | NEMA3 / NEMA4                                                                                                                                                                                                                                                                                                                                                                             |                      |                       |
| Operating temp.               | -4 to +140 °F derating above 122 °F                                                                                                                                                                                                                                                                                                                                                       |                      |                       |
| Storage temp.                 | -4 to +140 °F                                                                                                                                                                                                                                                                                                                                                                             |                      |                       |
| Altitude                      | 0-3280 ft without derating / 0-11480 ft with derating                                                                                                                                                                                                                                                                                                                                     |                      |                       |
| Humidity                      | 0-95 %, non-condensing                                                                                                                                                                                                                                                                                                                                                                    |                      |                       |
| Inputs/outputs                | FM100                                                                                                                                                                                                                                                                                                                                                                                     | FM200                | FM300                 |
| Digital inputs                | 1                                                                                                                                                                                                                                                                                                                                                                                         | 1                    | 2                     |
| Digital inputs/ outputs       | 1                                                                                                                                                                                                                                                                                                                                                                                         | 1                    | 2                     |
| Relay outputs                 | -                                                                                                                                                                                                                                                                                                                                                                                         | 2                    | 2                     |
| Analog inputs                 | 1 (only V)                                                                                                                                                                                                                                                                                                                                                                                |                      |                       |
| Pt100/Pt1000 inputs           | -                                                                                                                                                                                                                                                                                                                                                                                         | -                    | 2                     |
| +5 V supply                   | Y                                                                                                                                                                                                                                                                                                                                                                                         | Y                    | Y                     |
| +24 V supply                  | -                                                                                                                                                                                                                                                                                                                                                                                         | Y                    | Y                     |
| Grundfos Digital Sensor input | -                                                                                                                                                                                                                                                                                                                                                                                         | Y                    | Y                     |
| LiqTec sensor input           | -                                                                                                                                                                                                                                                                                                                                                                                         | -                    | Y                     |
| Digital inputs (dedicated)    | 0-5 V                                                                                                                                                                                                                                                                                                                                                                                     |                      |                       |
| Digital inputs/ outputs       | 0-24 V, resistive or inductive                                                                                                                                                                                                                                                                                                                                                            |                      |                       |
| Analog input                  | 0-20 mA / 4-20 mA, 0.5 - 3.5 V / 0-5 V / 0-10 V                                                                                                                                                                                                                                                                                                                                           |                      |                       |
| Relay output                  | 250 V AC/30 V DC, max. continuous current 2 A rms                                                                                                                                                                                                                                                                                                                                         |                      |                       |
| Connectivity                  |                                                                                                                                                                                                                                                                                                                                                                                           |                      |                       |
| Wireless (radio)              | Yes, GENIair                                                                                                                                                                                                                                                                                                                                                                              |                      |                       |
| RS-485                        | Yes, GENIair                                                                                                                                                                                                                                                                                                                                                                              |                      |                       |
| Communication options         | <ul style="list-style-type: none"><li>• LONWorks (CIM 100)</li><li>• PROFIBUS DP (CIM 150)</li><li>• Modbus RTU (CIM 200)</li><li>• GSM/GPRS (CIM 250)</li><li>• 3G/4G cellular (CIM 260)</li><li>• GiC/GRM 3G/4G (CIM 280)</li><li>• BACnet MS/TP (CIM 300) PROFINET IO (CIM 500)</li><li>• Modbus TCP (CIM 500)</li><li>• BACnet IP (CIM 500)</li><li>• Ethernet IP (CIM 500)</li></ul> |                      |                       |
|                               |                                                                                                                                                                                                                                                                                                                                                                                           |                      |                       |
|                               |                                                                                                                                                                                                                                                                                                                                                                                           |                      |                       |
|                               |                                                                                                                                                                                                                                                                                                                                                                                           |                      |                       |
|                               |                                                                                                                                                                                                                                                                                                                                                                                           |                      |                       |
|                               |                                                                                                                                                                                                                                                                                                                                                                                           |                      |                       |
|                               |                                                                                                                                                                                                                                                                                                                                                                                           |                      |                       |
|                               |                                                                                                                                                                                                                                                                                                                                                                                           |                      |                       |
|                               |                                                                                                                                                                                                                                                                                                                                                                                           |                      |                       |
| Compliance                    |                                                                                                                                                                                                                                                                                                                                                                                           |                      |                       |
| Conformity to standards       | CE, EAC, RCM, CCC, and cURus (UL)                                                                                                                                                                                                                                                                                                                                                         |                      |                       |
| Harmonics                     | IEC/EN 61000-3-12                                                                                                                                                                                                                                                                                                                                                                         |                      |                       |
| EMC                           | Up to 10.0 HP (7.5 HP low speed): Category C1 according to EN 61800-3, corresponding to CISPR 11, class B (residential area)                                                                                                                                                                                                                                                              |                      |                       |
|                               | Above 10.0 HP (7.5 HP low speed): Category C3 according to EN 61800-3, corresponding to CISPR 11, class A, group 2 (industrial area)                                                                                                                                                                                                                                                      |                      |                       |

99689406 0719

ECM: 1264915

## Vibration Isolation

### Common vibration concerns with frame mounted end suction pumps

- Misalignment between motor shaft and pump shaft is the #1 source of pump vibration
  - o End suction pumps typically have large over-hung impellers with high rotating inertia, that when misaligned creates large unbalanced forces and results in vibration
  - o Offset discharge throat of the volute creates the radial load
  - o Decreased component life
- End suction pump bearing loading is primarily from radial forces



Unbalanced forces and increased vibration

### Grundfos CR Multistage pump benefits:



- Register fit between motor and pump
- No alignment required for lifetime of operation
- Minimized vibration
- Longer component life
- Quiet operation (product lubricated pump bearings)
- CR Multistage pumps offer the lowest rotating inertia compared to most other pumps in same duty conditions
- Low rotating inertia equals less opportunity for vibration
- Multistage pump bearing loading is on average 10% radial and 90% axial forces



No alignment is required

### Pump systems with Grundfos CR(E) Multistage pumps

- Vibration Isolation:
  - o 1/2" thick dampeners at pump base mounting points (4 per pump)
  - o Inertia bases and grouting are not required when mounted to concrete housekeeping pad
  - o Flexible connectors on manifold connections are recommended

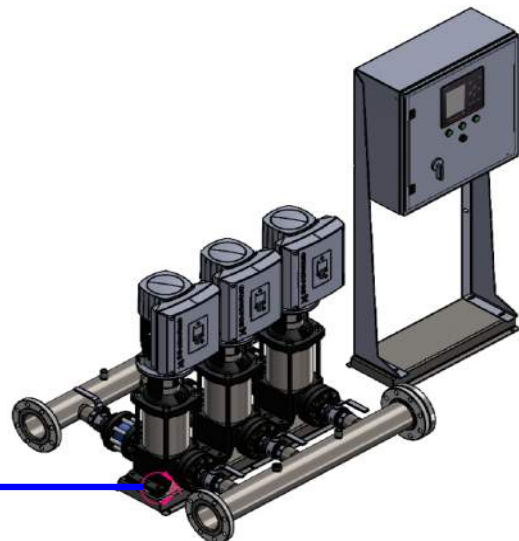



Panel Part Number:  
99554621

Description  
Control MPC E  
2 X 7.5HP  
3 X 480V

Selected Options: System Fault Light, Audible Alarm, Surge Protection, Pump Run Light, Normal/Emergency Switch, Service Disconnect Switch

|         |           |                                        |                                                                                                                                                                 |                 |          |                                                                                       |  |             |
|---------|-----------|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------|---------------------------------------------------------------------------------------|--|-------------|
| 0       | 4/12/2019 | Control MPC E<br>2 X 7.5HP<br>3 X 480V | This drawing and its content is the property of GRUNDFOS. It may not be copied for third third parties or competitors. Changes are only to be made by GRUNDFOS. | PROJECT:        | 99554621 |  |  |             |
| 1       | 9/9/2019  |                                        |                                                                                                                                                                 |                 |          |                                                                                       |  |             |
|         |           |                                        |                                                                                                                                                                 | EDW-WD-GPC-1001 |          | Panel Part Number: 99554621                                                           |  | SHEET: 1/10 |
|         |           |                                        |                                                                                                                                                                 |                 |          |                                                                                       |  |             |
| ECM/Rev | Date      |                                        |                                                                                                                                                                 |                 |          |                                                                                       |  |             |

**Feeder Circuit Protection:**  
Feeder circuit protection to be provided by others.  
Type and size to be based on local, state and national electrical codes

**SCCR Rating:** 100 kA RMS Symmetric,  
480V

**UL Type Rating:** 3R

**Largest Motor FLA and  
Panel Maximum FLA:**

|                     |         |
|---------------------|---------|
| Motor<br>Horsepower | 7.5HP   |
| Motor FLA           | 9.1FLA  |
| Panel Max. FLA      | 19.2FLA |

| Wire Type                                       | Color                 | Abbr. |
|-------------------------------------------------|-----------------------|-------|
| +12/24VDC<br>Power/PLC<br>Input(s)              | Blue                  | BU    |
| -12/24VDC<br>Power/PLC<br>Input(s)              | Blue w/White Stripe   | BUWH  |
| 115VAC Primary<br>Line Power                    | Black                 | BK    |
| 115VAC Neutral                                  | White                 | WH    |
| Ground/PE                                       | Green/Yellow Stripe   | GNYE  |
| Analog Inputs                                   | Orange                | OG    |
| Analog Outputs                                  | Orange                | OG    |
| Digital Inputs<br>(CU Components)               | Violet                | VT    |
| Ground for<br>Digital Inputs<br>(CU Components) | Violet w/White Stripe | VTWH  |
| Digital Outputs                                 | Yellow                | YE    |
| Power L1                                        | Black                 | BK    |
| Power L2                                        | Orange                | OG    |
| Power L3                                        | Red                   | RD    |
| Power Neutral                                   | White                 | WH    |
| All Other Wiring                                | Brown                 | BN    |

**Safety / Application Notes:**  
**\*\* Please Reference the "BOOSTERPAQ - HYDRO MPC"**  
**Installation and Operation Instructions**  
**"BEFORE" Applying power to Panel.**

- \*\* Power supply wires in front of main disconnect switch have dangerous voltage even though the main disconnect switch is off.
- \*\* Control panel must be connected professionally to the earth / ground.
- \*\* GRUNDFOS MLE motors have an integrated variable frequency drive (VFD) which provides motor overload protection. If a system utilizes MLE motors, the motor overload protection is provided by the VFD and does not require any additional motor overload protection.

Cross Reference Definition  
(##-##)  
Sheet-Row

Wire Types

Internal Panel Wire

External Wire

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32


33

34

35

1-Table of Contents


| Drawing   | Revision | Date      | Created by | Description                                                   |
|-----------|----------|-----------|------------|---------------------------------------------------------------|
| <u>01</u> | 0        | 4/12/2019 | bmabie     | Cover Page 01                                                 |
| <u>02</u> | 0        | 4/12/2019 | bmabie     | Cover Page 02                                                 |
| <u>03</u> | 0        | 4/12/2019 | bmabie     | Drawings list                                                 |
| <u>04</u> | 0        | 4/12/2019 | bmabie     | Power 01                                                      |
| <u>05</u> | 0        | 4/12/2019 | bmabie     | Control 01                                                    |
| <u>06</u> | 0        | 4/12/2019 | bmabie     | Control 02                                                    |
| <u>07</u> | 0        | 4/12/2019 | bmabie     | Panel Layout                                                  |
| <u>08</u> | 0        | 4/12/2019 | bmabie     | Panel Views                                                   |
| <u>09</u> | 0        | 5/16/2019 | msaulls    | Bill Of Materials grouped by manufacturer Rev1.0 (Components) |
| <u>10</u> | 0        | 5/16/2019 | msaulls    | Bill Of Materials grouped by manufacturer Rev1.0 (Components) |
| 11        | 0        | 4/12/2019 | bmabie     | Main electrical closet                                        |

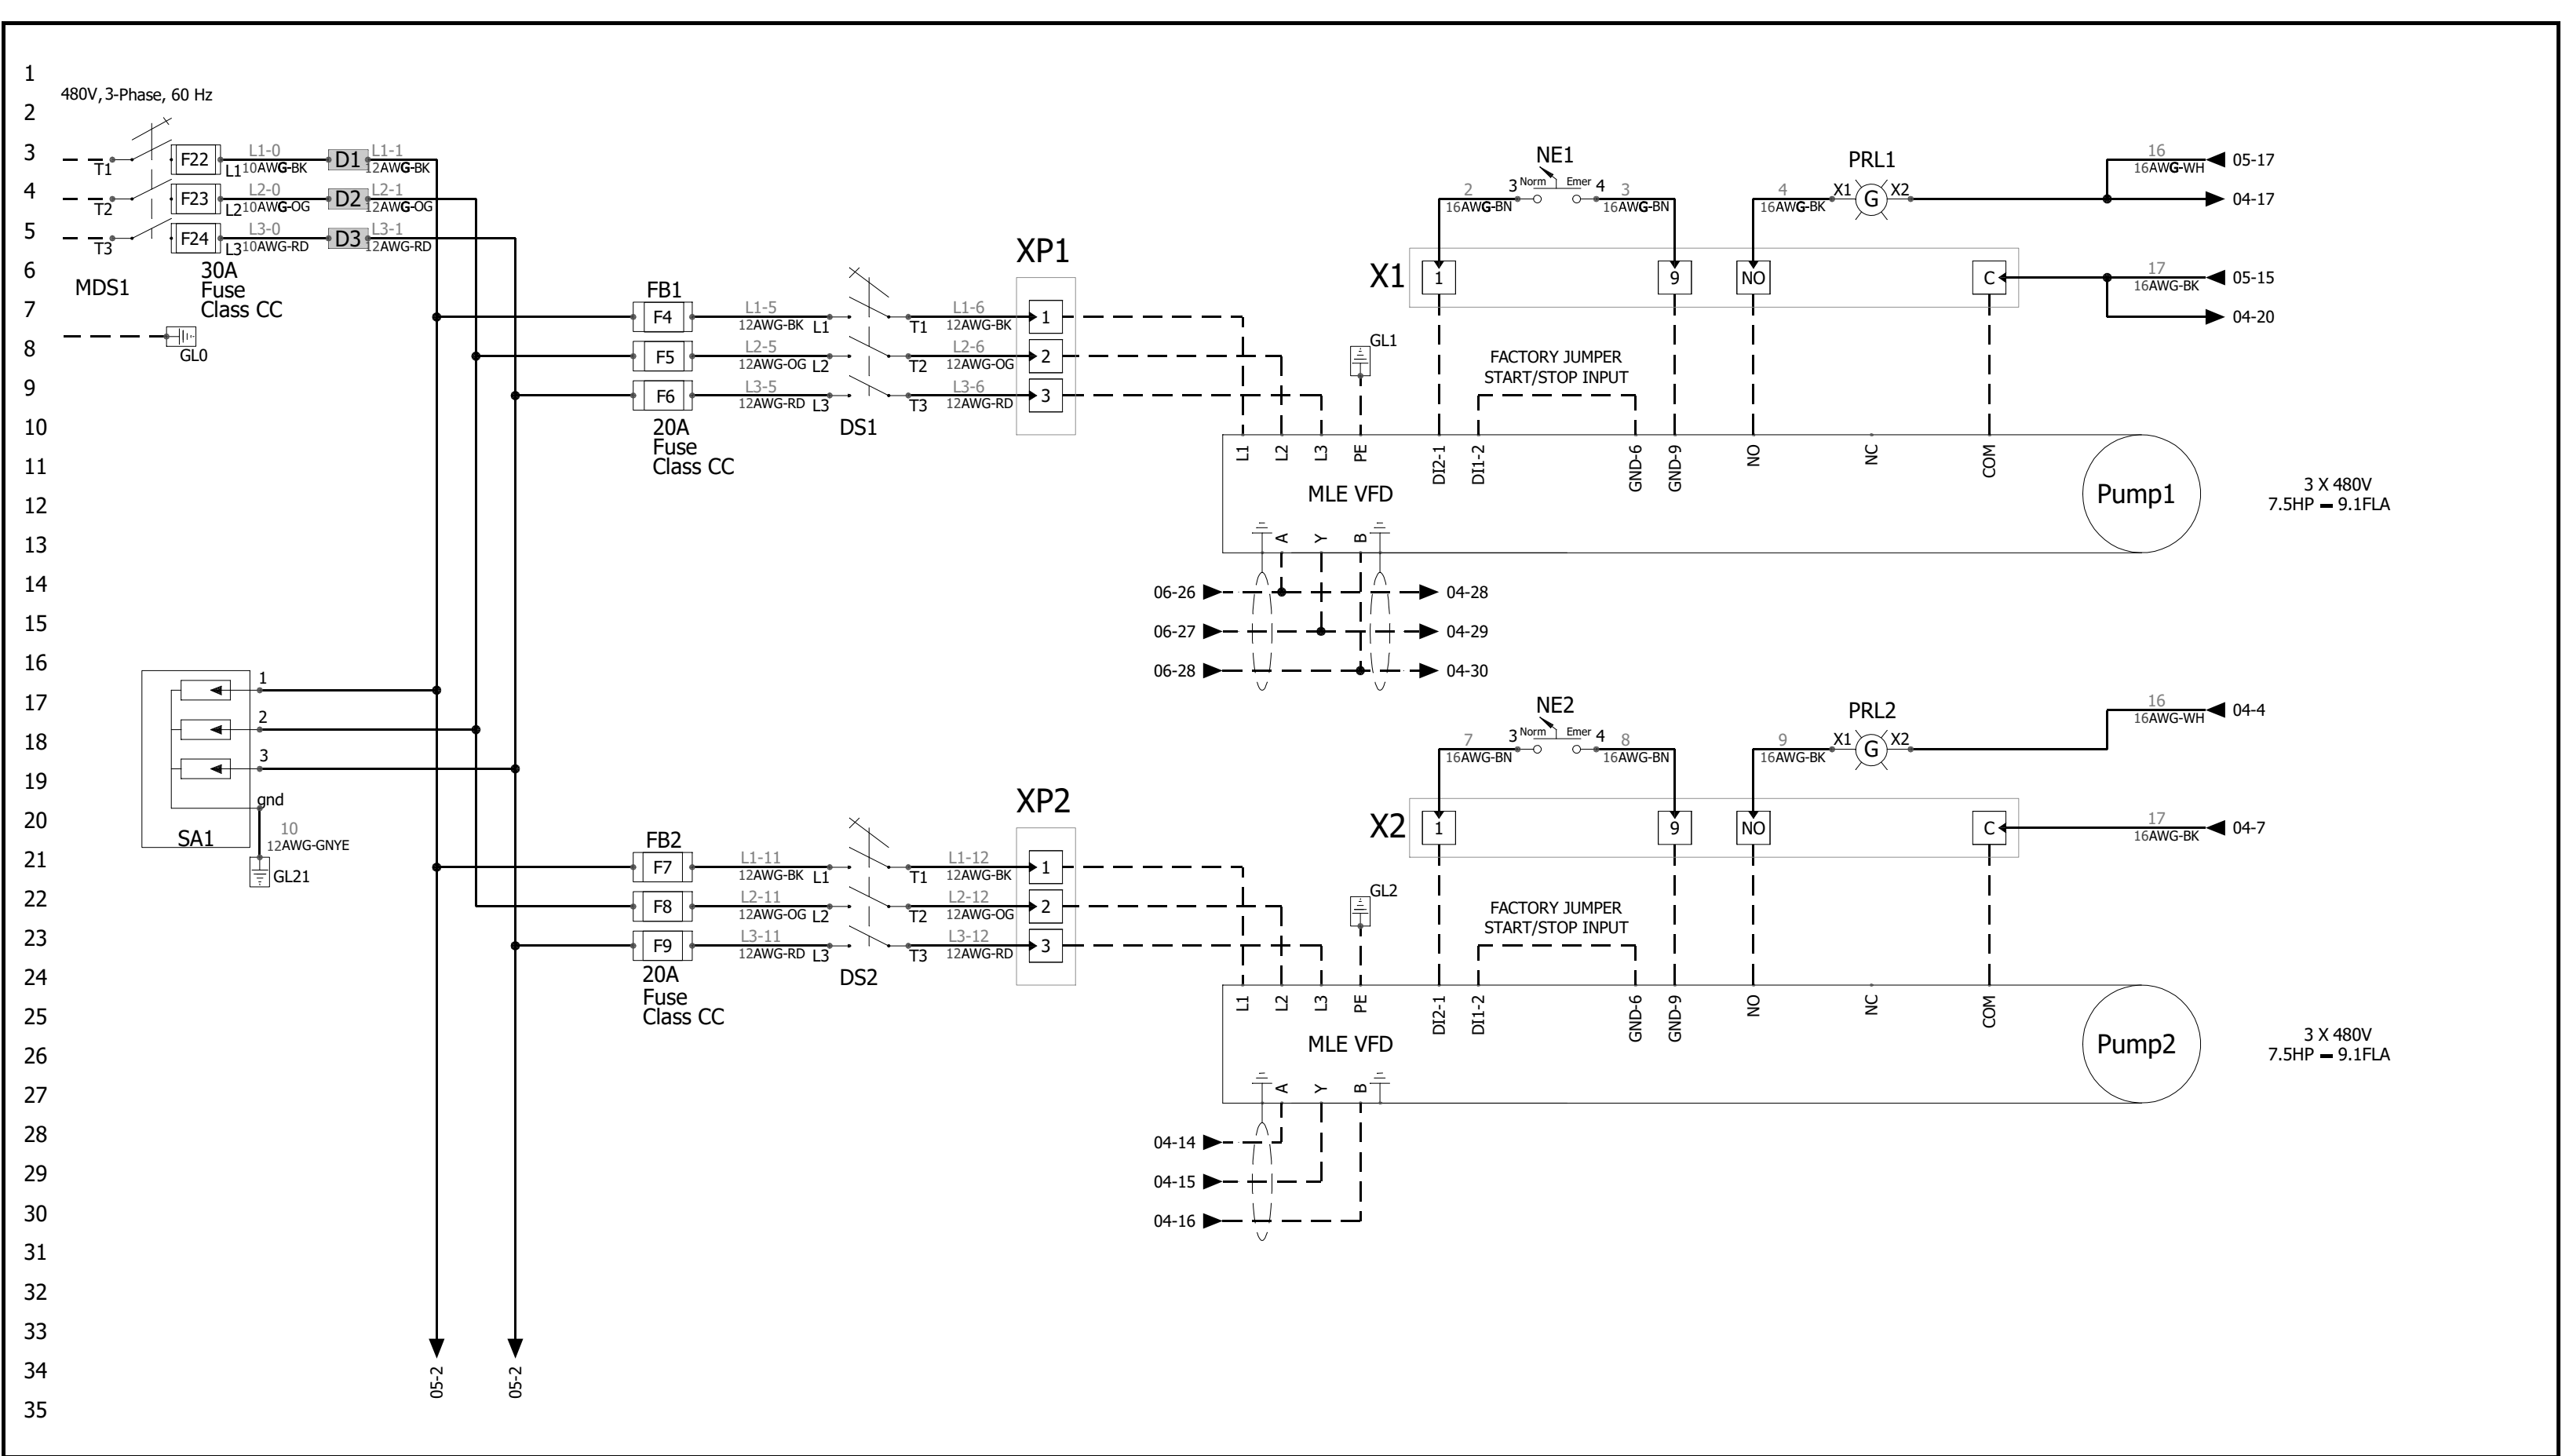

|         |           |                                        |                                                                                                                                                                 |                 |          |                                                                                       |             |
|---------|-----------|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------|---------------------------------------------------------------------------------------|-------------|
| 0       | 4/12/2019 | Control MPC E<br>2 X 7.5HP<br>3 X 480V | This drawing and its content is the property of GRUNDFOS. It may not be copied for third third parties or competitors. Changes are only to be made by GRUNDFOS. | PROJECT:        | 99554621 |  |             |
| 1       | 9/9/2019  |                                        |                                                                                                                                                                 |                 |          |                                                                                       |             |
|         |           |                                        |                                                                                                                                                                 |                 |          |                                                                                       |             |
|         |           |                                        |                                                                                                                                                                 |                 |          |                                                                                       |             |
| ECM/Rev | Date      |                                        |                                                                                                                                                                 | EDW-WD-GPC-1001 |          | Panel Part Number: 99554621                                                           | SHEET: 4/10 |




1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35

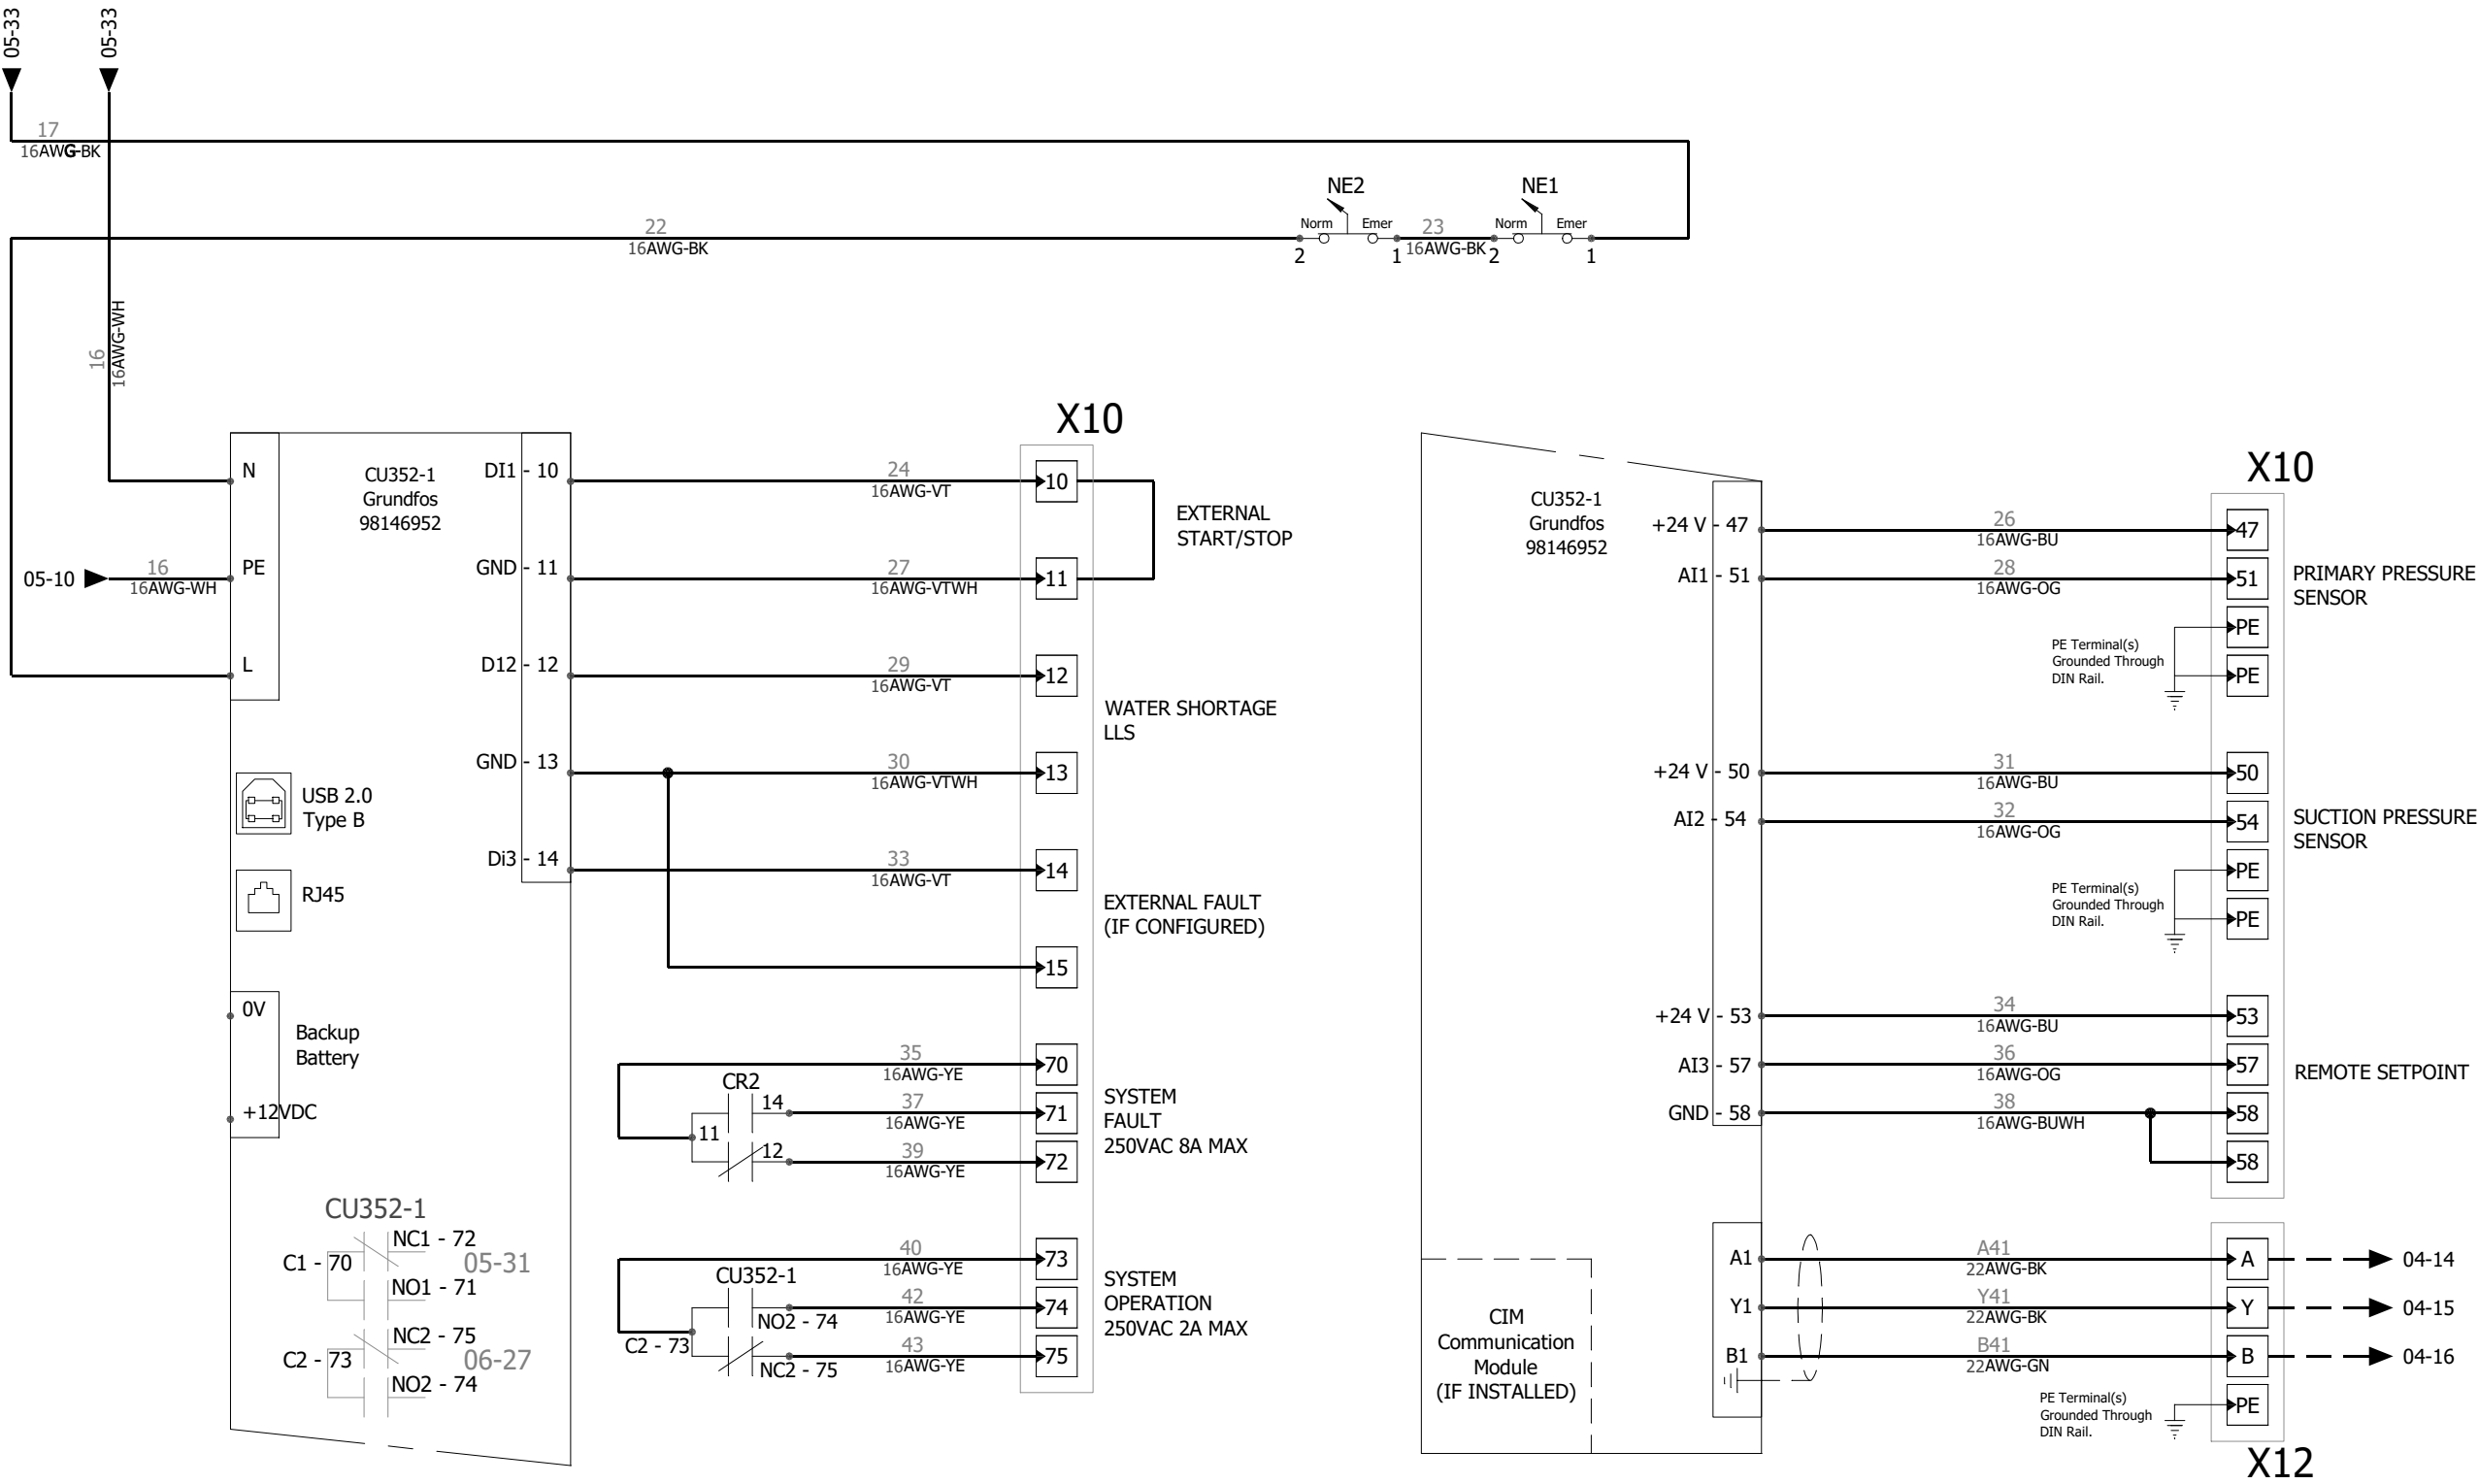


CIM COMMUNICATION MODULE TERMINATIONS

| CIM     | Terminal 1                         | Terminal 2           | Terminal 3            | Terminal 4                    |
|---------|------------------------------------|----------------------|-----------------------|-------------------------------|
| CIM 110 | LON                                | LON terminal A       | LON terminal B        | LON terminal for cable screen |
| CIM 150 | PROFIBUS DP                        | PROFIBUS terminal B  | PROFIBUS terminal A   | PROFIBUS terminal DGND        |
| CIM 200 | Modbus RTU                         | Modbus terminal D1   | Modbus terminal D0    | Modbus terminal common/GND    |
| CIM 300 | BACnet MS/TP                       | BACnet Plus terminal | BACnet Minus terminal | BACnet Ground terminal        |
| CIM 500 | BACnet IP, Modbus TCP, PROFINET IO | RJ45                 | RJ45                  |                               |

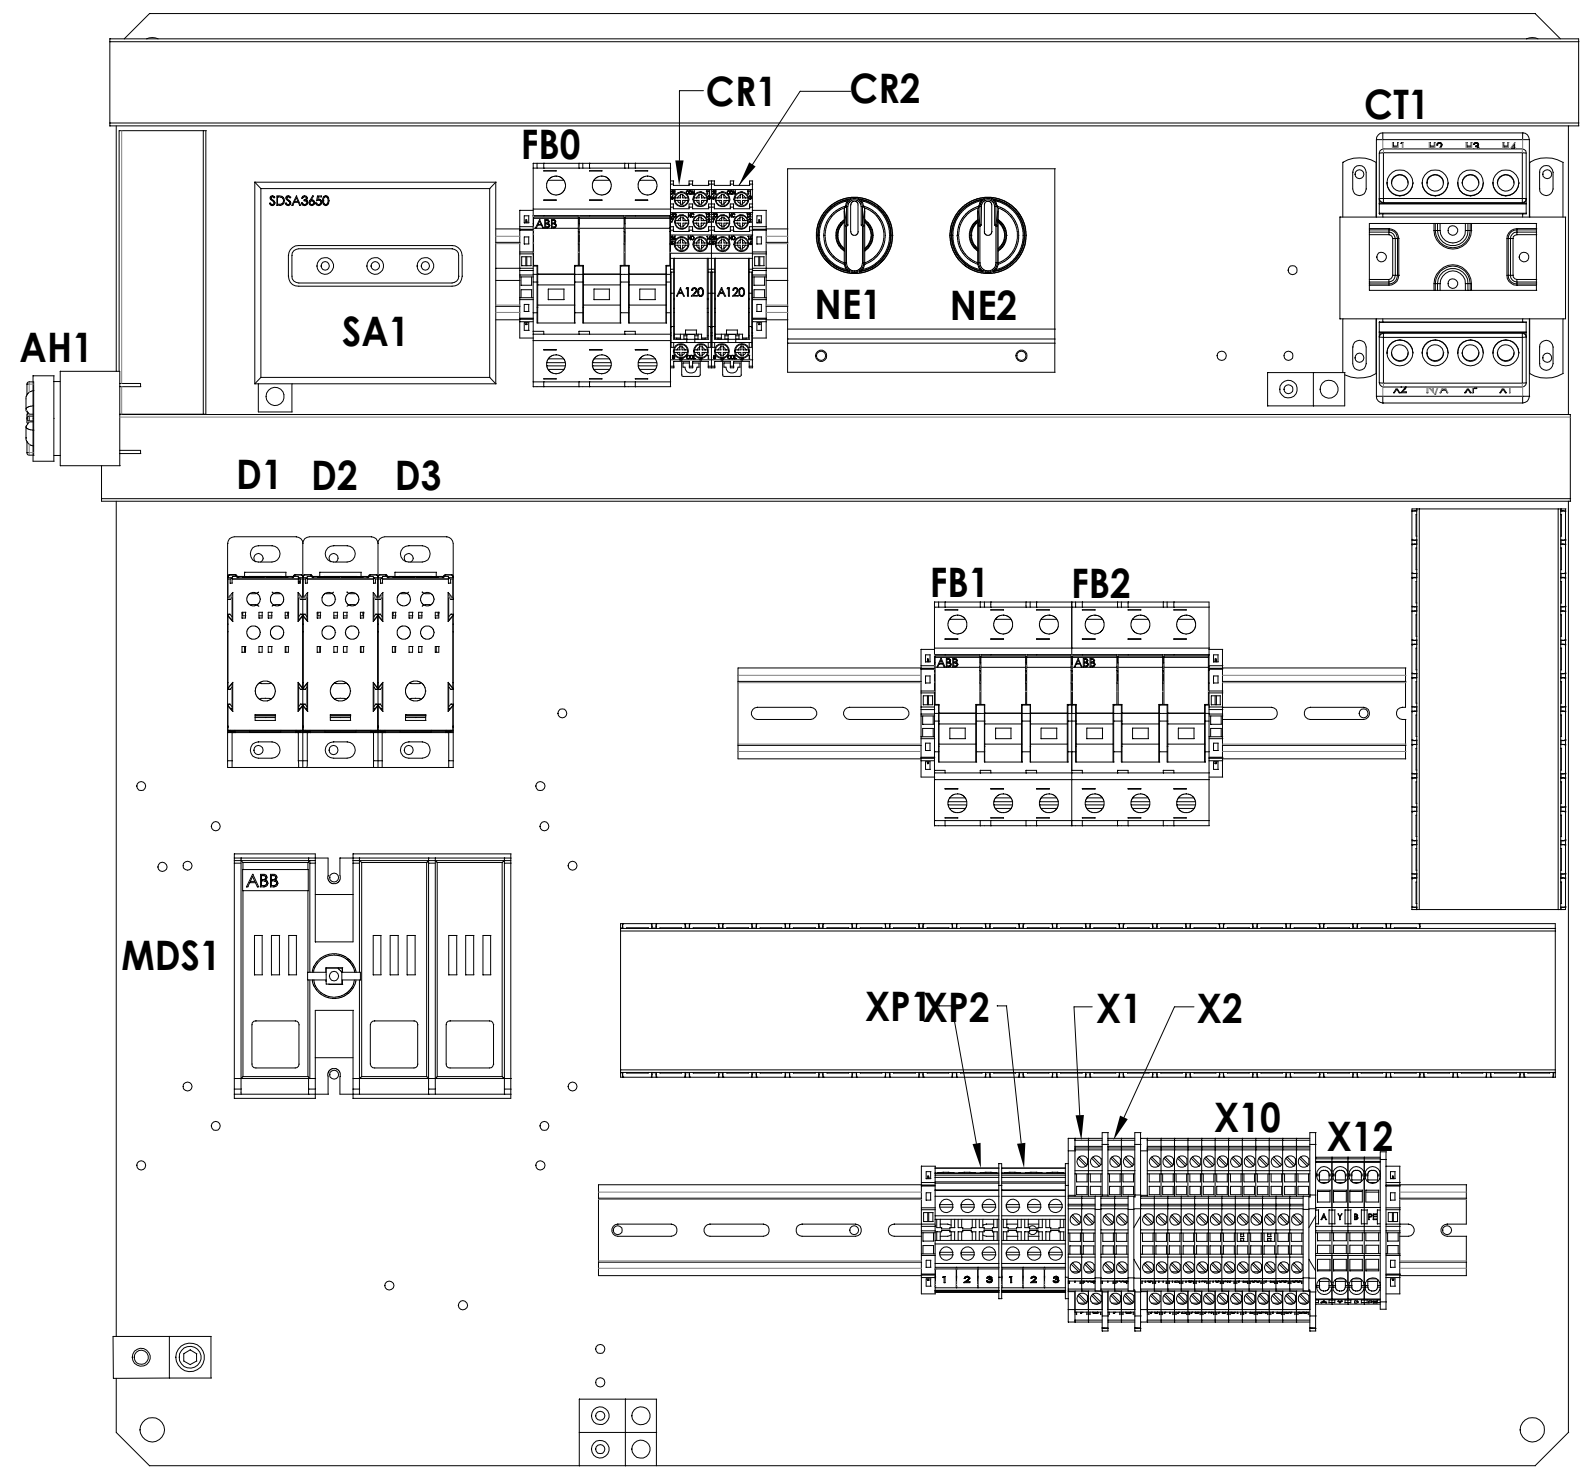

|         |           |                                        |                                                                                                                                                           |                   |                 |                                                                                                       |             |
|---------|-----------|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------|-------------------------------------------------------------------------------------------------------|-------------|
| 0       | 4/12/2019 | Control MPC E<br>2 X 7.5HP<br>3 X 480V | This drawing and its content is the property of GRUNDFOS. It may not be copied for third parties or competitors. Changes are only to be made by GRUNDFOS. | PROJECT: 99554621 | EDW-WD-GPC-1001 | <b>GRUNDFOS</b>  |             |
| 1       | 9/9/2019  |                                        |                                                                                                                                                           |                   |                 |                                                                                                       |             |
|         |           |                                        |                                                                                                                                                           |                   |                 | Panel Part Number: 99554621                                                                           | SHEET: 7/10 |
| ECM/Rev | Date      |                                        |                                                                                                                                                           |                   |                 |                                                                                                       |             |

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35

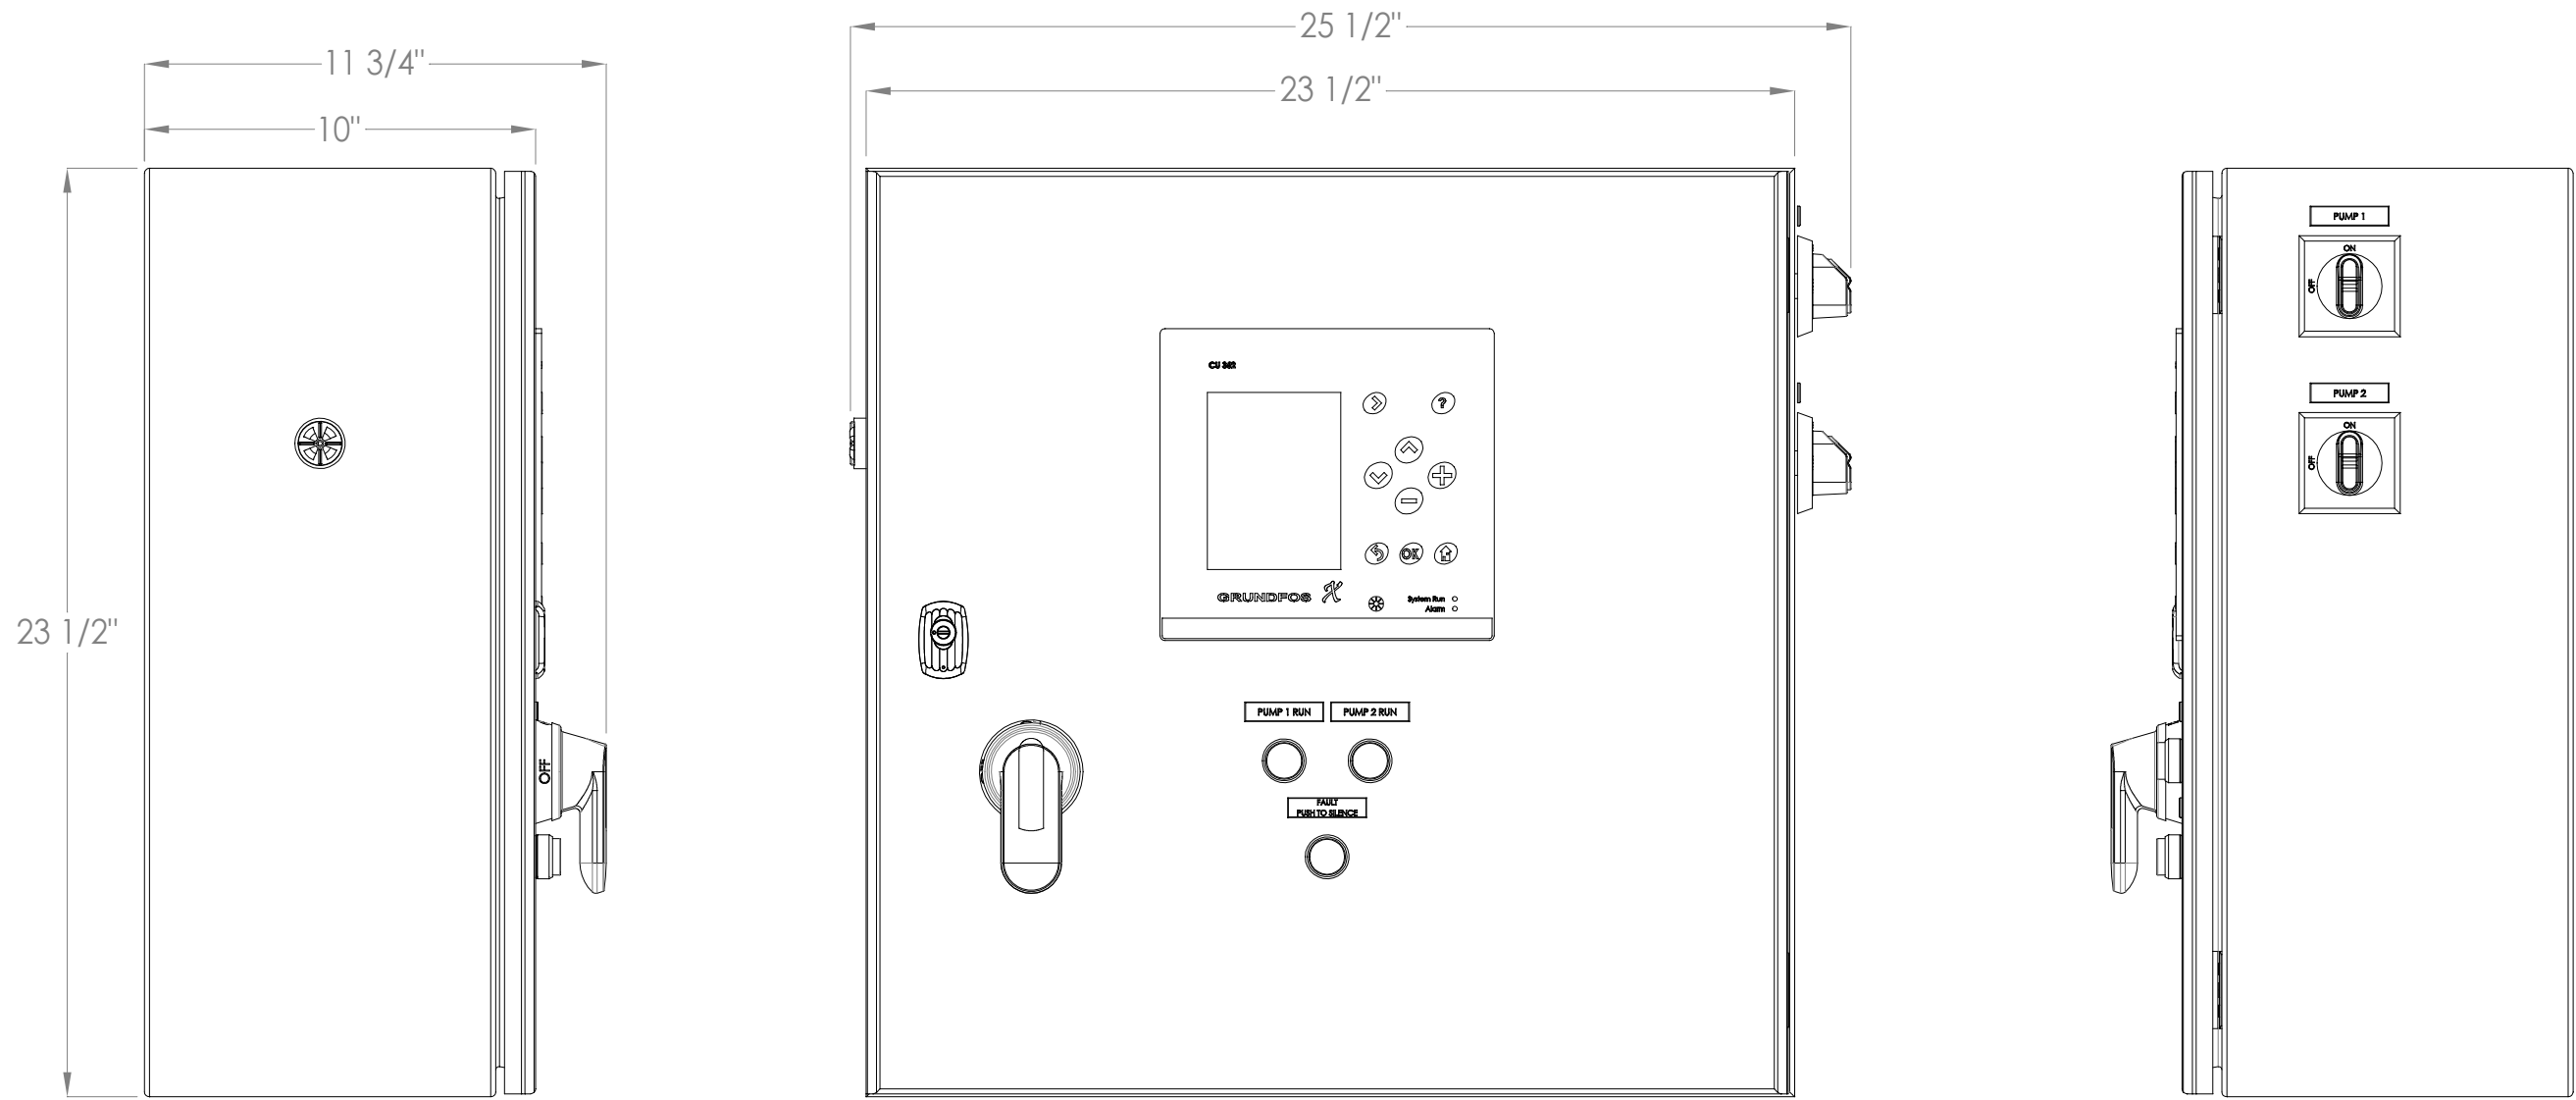

CLEARANCE FROM FRONT OF ENCLOSURE MUST BE 36".  
CLEARANCE FROM DISCONNECT HANDLES MUST BE 6".

|         |           |                                        |                                                                                                                                                           |                   |                     |                             |             |
|---------|-----------|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------|-----------------------------|-------------|
| 0       | 4/12/2019 | Control MPC E<br>2 X 7.5HP<br>3 X 480V | This drawing and its content is the property of GRUNDFOS. It may not be copied for third parties or competitors. Changes are only to be made by GRUNDFOS. | PROJECT: 99554621 | <div>GRUNDFOS</div> | Panel Part Number: 99554621 | SHEET: 8/10 |
| 1       | 9/9/2019  |                                        |                                                                                                                                                           |                   |                     |                             |             |
|         |           |                                        |                                                                                                                                                           | EDW-WD-GPC-1001   |                     |                             |             |
| ECM/Rev | Date      |                                        |                                                                                                                                                           |                   |                     |                             |             |

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
84

EC

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35

| Article Number       | Mark                          | Manufacturer       | Reference            | Description                                    | Quantity | Component Type                      |
|----------------------|-------------------------------|--------------------|----------------------|------------------------------------------------|----------|-------------------------------------|
| 65-TB-PT-50A         | XP1 1 , XP2 1                 | OSI                | 65-TB-PT-50A         | Terminal Blocks; Single Pump Pass Through, 50A | 2        | Pump Power Terminal Blocks          |
| 65-TB-SINGLE-PUMP-DB | X1 1 , X2 1                   | OSI                | 65-TB-SINGLE-PUMP-DB | Terminal Blocks; MLE Pump Control              | 2        | Pump Control Terminal Blocks        |
| 13-16-86-1680        | GL0 , GL1 , GL2 , GL20 , GL21 | Raco               | TA2-Bulk             | Ground Lug; 2AWG, Burndy                       | 5        | Ground Lug                          |
| 13-16-61-1010        | SA1                           | Schneider          | SDSA 3650            | Surge Arrestor; 3 Phase, 600V, WYE             | 1        | Surge Arrestor                      |
| 65-ENCL-2424-RSH     | L1                            | Schneider Electric | 65-ENCL-2424-RSH     | Enclosure; 24X24 Right Side Hinge              | 1        | Main electrical closet              |
| 13-16-36-1421        | PRL1 , PRL2                   | Siemens            | 3SU11036AA401AA0     | Pilot Light; Green, 110 VAC Complete           | 2        | Pump 1 Run Light , Pump 2 Run Light |