

Count	Description
1	<p data-bbox="225 338 427 360">NBS 025-095/8.19</p>  <p data-bbox="619 629 1062 651">Product photo could vary from the actual product</p> <p data-bbox="225 663 488 685">Product No.: 92560112</p> <p data-bbox="225 752 1426 801">The pumps are non-self-priming, single-stage, centrifugal volute pumps with axial inlet port, radial outlet port and horizontal shaft.</p> <p data-bbox="225 808 1377 857">The pump has a back pull-out design enabling removal of the motor, motor stool, cover and impeller without disturbing the pump housing or pipework.</p> <p data-bbox="225 864 1386 887">All pumps are according to ISO 5199 standards, adjusted for American dimensions on pump and its flanges.</p> <p data-bbox="225 927 1417 976">Inlet and outlet flanges are according to ASME 16.1/16.42. Dimensions and rated performance are according to 175/363 PSI (12/25 bar).</p> <p data-bbox="225 1016 940 1039">The mechanical shaft seal has dimensions according to EN 12756.</p> <p data-bbox="225 1079 1374 1128">Motors are with main dimensions to NEMA standards. The pumps can be equipped with an MLE motor with integrated frequency converter or connected to a Grundfos CUE external frequency converter.</p>



Company name:



Created by:

Phone:

Date:

12/19/2021

92560112 NBS 025-095/8.19 AASG6S2ESBQQEHY6 60 Hz

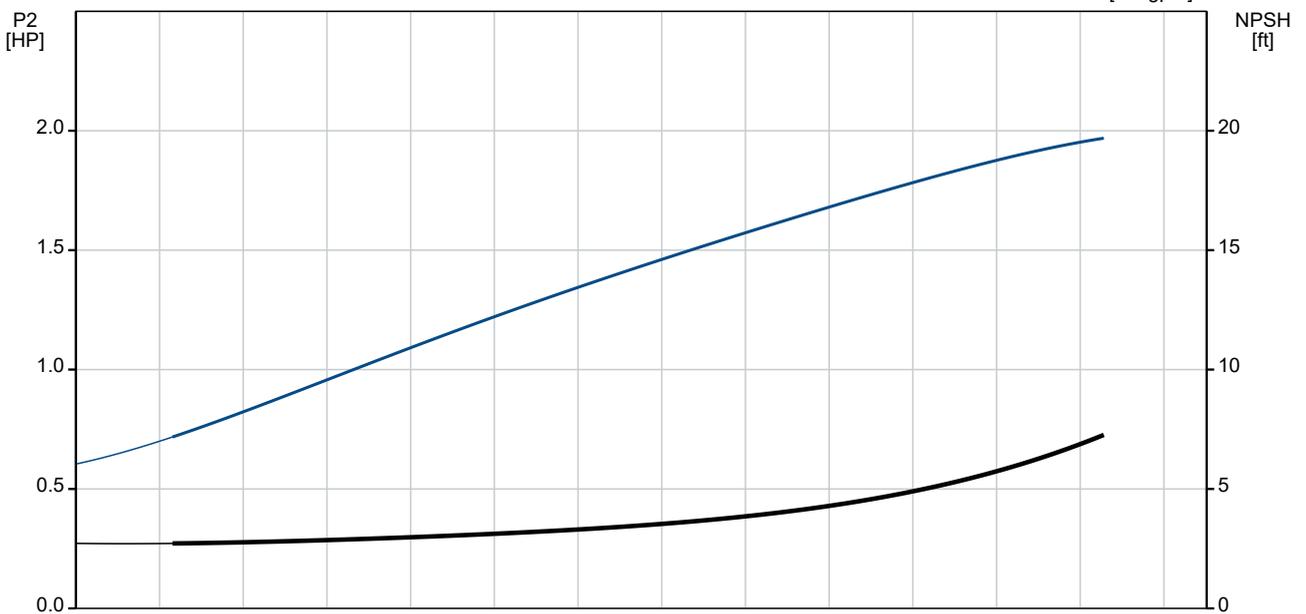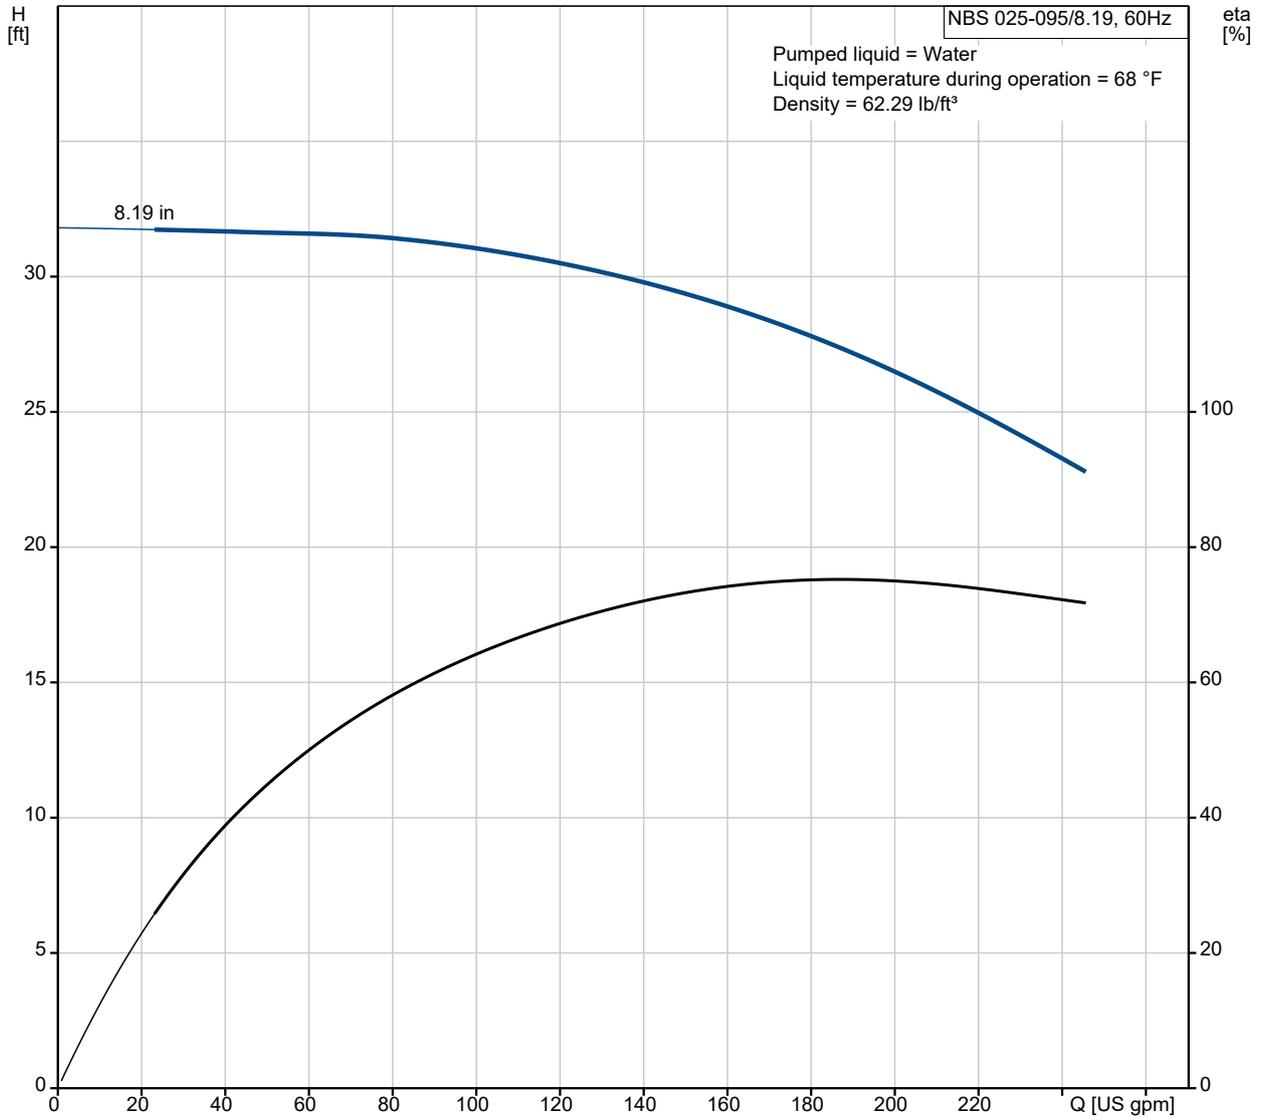



Company name:

Created by:

Phone:

Date:

12/19/2021

Description

Value

Country of origin:

US

